

2013 Ford Focus Electric

Battery Charge Profiles at Different Temperatures



Select Battery Specifications¹

Manufacturer:	LG Chem
Type:	Lithium-Ion (LMO)
Nominal System Voltage:	318.2 V
Rated Pack Energy:	23 kWh
Cooling:	Active - Liquid Cooling

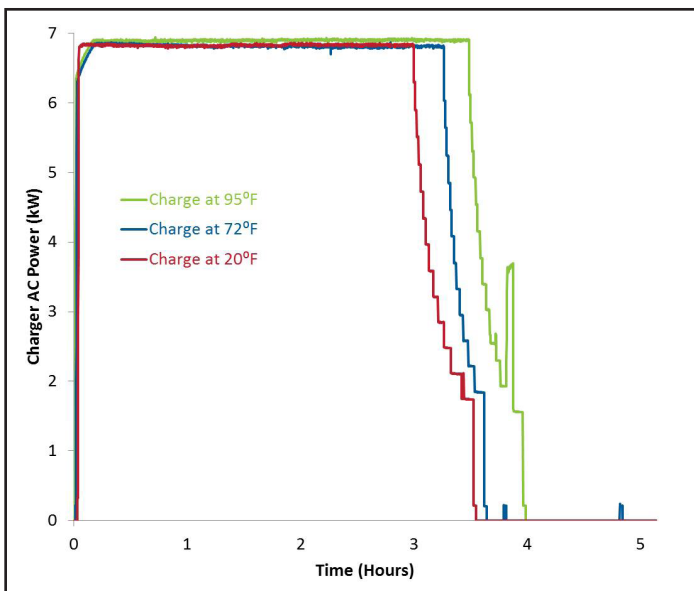


Fig. 1 Ford Focus BEV charger power consumption during charge

Summary

The 2013 Ford Focus Electric's battery was charged with an AC level 2 EVSE from depletion at 95°F, 72°F, and 20°F.² For all temperatures, the charger consumes constant power until the last 30 minutes when power gradually tapers down (see Figure 1). The vehicle battery charge energy consumption shows a monotonic increase with temperature. The vehicle was also soaked at 20°F for about 2 1/2 days after the full charge at 72°F, resulting in an additional 18.12 kWh consumption. All tests were performed in a chassis dynamometer chamber with temperature controls.³

Key Charging Experiment Results

	Peak Power (kW)	Energy Consumed (kWh)
Charge at 95°F	6.94	24.70
Charge at 72°F	6.87	22.54
Charge at 20°F	6.87	21.57

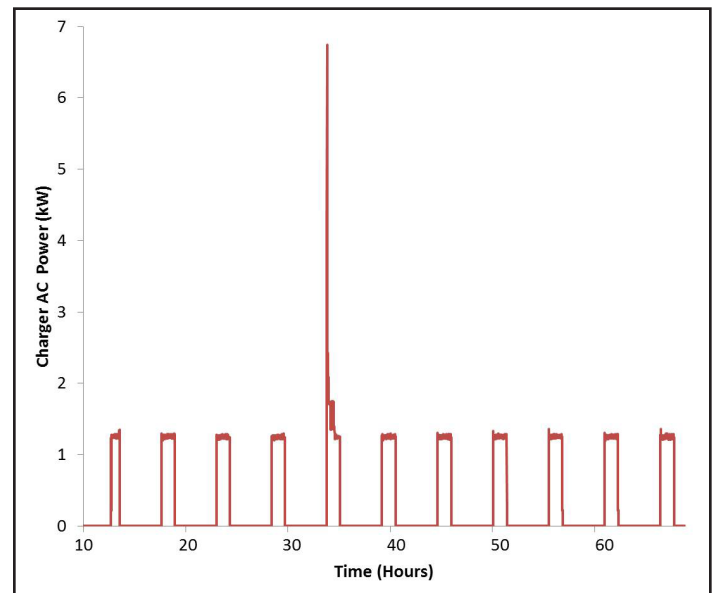


Fig. 2 Ford Focus BEV charger power consumption while left plugged in at 20°F

Notes:

- Vehicle specifications were supplied by the manufacturer, measured, or derived from a literature review. For detailed specifications, see Baseline Testing Results available at avt.inl.gov
- Ambient temperatures were adjusted at the end of charging: 95°F to 72°F, 72°F to 20°F, and 20°F to 72°F
- The experiments were conducted at Argonne National Laboratory (ANL) for the Advanced Vehicle Testing Activity (AVTA)

As a production vehicle, this vehicle is assumed to meet all Federal Motor Vehicle Safety Standards (FMVSS) for Battery Electric Vehicles.

This information was prepared with the support of the U.S. Department of Energy (DOE) under Award No. DE-EE0005501. However, any opinions, findings, conclusions or recommendations expressed herein are those of the author(s) and do not necessarily reflect the views of the DOE.