

2015 Kia Soul EV – VINs 1908, 1918, 1919 & 1920

Advanced Vehicle Testing –DC Fast Charging at Temperature Test Results



VEHICLE, ENERGY STORAGE SYSTEM, AND DCFC DETAILS¹

Vehicle Details

Base Vehicle: 2015 Kia Soul EV
 Vehicle Type: BEV
 VINs: KNDJX3AE7F7001908; KNDJX3AE7F7001918;
 KNDJX3AE7F7001919; KNDJX3AE7F7001920

DCFC Details

Manufacturer: Hasetec
 Model/Type: HQC31-125-03AB/CHAdeMO
 Rated DC Charge Power: 50 kW
 De-Rated DC Current²: 120 A

Energy Storage System Specifications

Manufacturer: SK Innovation
 Type: Lithium-ion Polymer
 Useable Pack Energy/Capacity: 27.0 kWh/75.0 Ah
 Thermal Management: Active – Air

Test Dates by VIN

	1908	1918	1919	1920
0 °C	3/13/2015	3/12/2015	3/19/2015	3/18/2015
25 °C	3/15/2015	3/14/2015	3/21/2015	3/20/2015
50 °C	3/17/2015	3/16/2015	3/23/2015	3/22/2015

TEST RESULTS SUMMARY

Test Temp. (°C)	Total Charge Duration (hh:mm:ss)	End of Charge Range (mi)	Total DC Charge Energy (kWh)	Initial Charge Start/End SOC ³ (%)	Top-Off Charge Start/End SOC ³ (%)	Initial/Top-Off Charge Avg. Power (kW)	ESS ΔT ⁴ (°C)	ESS Thermal Regulation Energy ⁵ (kWh)
VIN 1908 - Beginning-of-Test (at 1,359 miles)⁶								
0 °C	00:50:12	91	23.9	7.5 / 80.0	80.0 / 90.0	37.8 / 10.6	6.5	0.75
25 °C	00:41:05	91	23.5	8.0 / 80.0	80.0 / 90.0	40.8 / 16.0	2.4	0.80
50 °C	00:58:23	91	24.0	7.5 / 80.0	80.0 / 90.0	28.9 / 8.8	3.6	1.28
Middle-of-Test								
0 °C								
25 °C								
50 °C								
End-of-Test								
0 °C								
25 °C								
50 °C								
VIN 1918 - Beginning-of-Test (at 580 miles)⁶								
0 °C	00:50:17	88	23.8	7.5 / 80.0	80.0 / 90.0	37.6 / 10.5	6.7	0.76
25 °C	00:43:25	94	23.4	8.0 / 80.0	80.0 / 90.0	39.6 / 13.7	3.1	0.91
50 °C	00:54:31	92	23.7	8.0 / 80.0	80.0 / 90.0	30.8 / 9.7	3.0	1.24
Middle-of-Test								
0 °C								
25 °C								
50 °C								
End-of-Test								
0 °C								
25 °C								
50 °C								

ADVANCED VEHICLE TESTING ACTIVITY

Test Temp. (°C)	Total Charge Duration (hh:mm:ss)	End of Charge Range (mi)	Total DC Charge Energy (kWh)	Initial Charge Start/End SOC ³ (%)	Top-Off Charge Start/End SOC ³ (%)	Initial/Top-Off Charge Avg. Power (kW)	ESS ΔT ⁴ (°C)	ESS Thermal Regulation Energy ⁵ (kWh)
VIN 1919 - Beginning-of-Test (at 507 miles)⁶								
0 °C	00:48:16	96	24.1	7.5 / 80.0	80.0 / 90.0	38.4 / 11.8	7.1	0.53
25 °C	00:39:54	97	23.7	7.5 / 80.0	80.0 / 90.0	41.3 / 17.8	3.2	0.74
50 °C	00:59:32	95	24.3	7.0 / 80.0	80.0 / 90.0	28.5 / 9.0	3.9	1.38
Middle-of-Test								
0 °C								
25 °C								
50 °C								
End-of-Test								
0 °C								
25 °C								
50 °C								
VIN 1920 - Beginning-of-Test (at 919 miles)⁶								
0 °C	00:48:53	89	24.2	7.0 / 80.0	80.0 / 90.0	38.4 / 11.5	6.7	0.63
25 °C	00:41:07	91	23.8	7.0 / 80.0	80.0 / 90.0	41.0 / 16.6	3.3	0.79
50 °C	00:58:37	91	24.3	7.5 / 80.0	80.0 / 90.0	29.0 / 9.0	3.8	1.26
Middle-of-Test								
0 °C								
25 °C								
50 °C								
End-of-Test								
0 °C								
25 °C								
50 °C								

Test Results Analysis

DC fast charging at temperature testing includes tests that measure the charge duration, energy transfer, and energy used to thermally regulate the energy storage system (ESS) for charge events at 0, 25 and 50 °C.⁷ The objective of this testing is to provide analysis about the effects of ambient temperature on DC fast charge-capable vehicles. These tests were performed as part of the US Department of Energy Advanced Vehicle Testing Activity, which is conducted by Idaho National Laboratory and the Intertek Center for Evaluation of Clean Energy Technology (CECET).

Test Results: Energy and SOC

Figures 1a, 1b, and 1c show the energy transferred to each vehicle and the change in state of charge (SOC) over the duration of each charge event for each of the specified temperatures. Each DC fast charge event consists of an initial charge event and a top-off charge event.^{8,9} The end of the initial charge is denoted by a dashed oval. Many vehicle manufacturers report the time required for a charge of the ESS to 80% SOC as being 30 minutes. For VIN 1908, the SOC_s recorded at the 30-minute mark for the 0, 25, and 50 °C tests were 75.5%, 79.5%, and 69.5%, respectively. For VIN 1918, the SOC_s recorded at the 30-minute mark for the 0, 25, and 50 °C tests were 74.5%, 78.5%, and 72.0%, respectively. For VIN 1919, the SOC_s recorded at the 30-minute mark for the 0, 25, and 50 °C tests were 76.0%, 80.0%, and 68.0%, respectively. For VIN 1920, the SOC_s recorded at the 30-minute mark for the 0, 25, and 50 °C tests were 75.5%, 79.0%, and 69.0%, respectively.

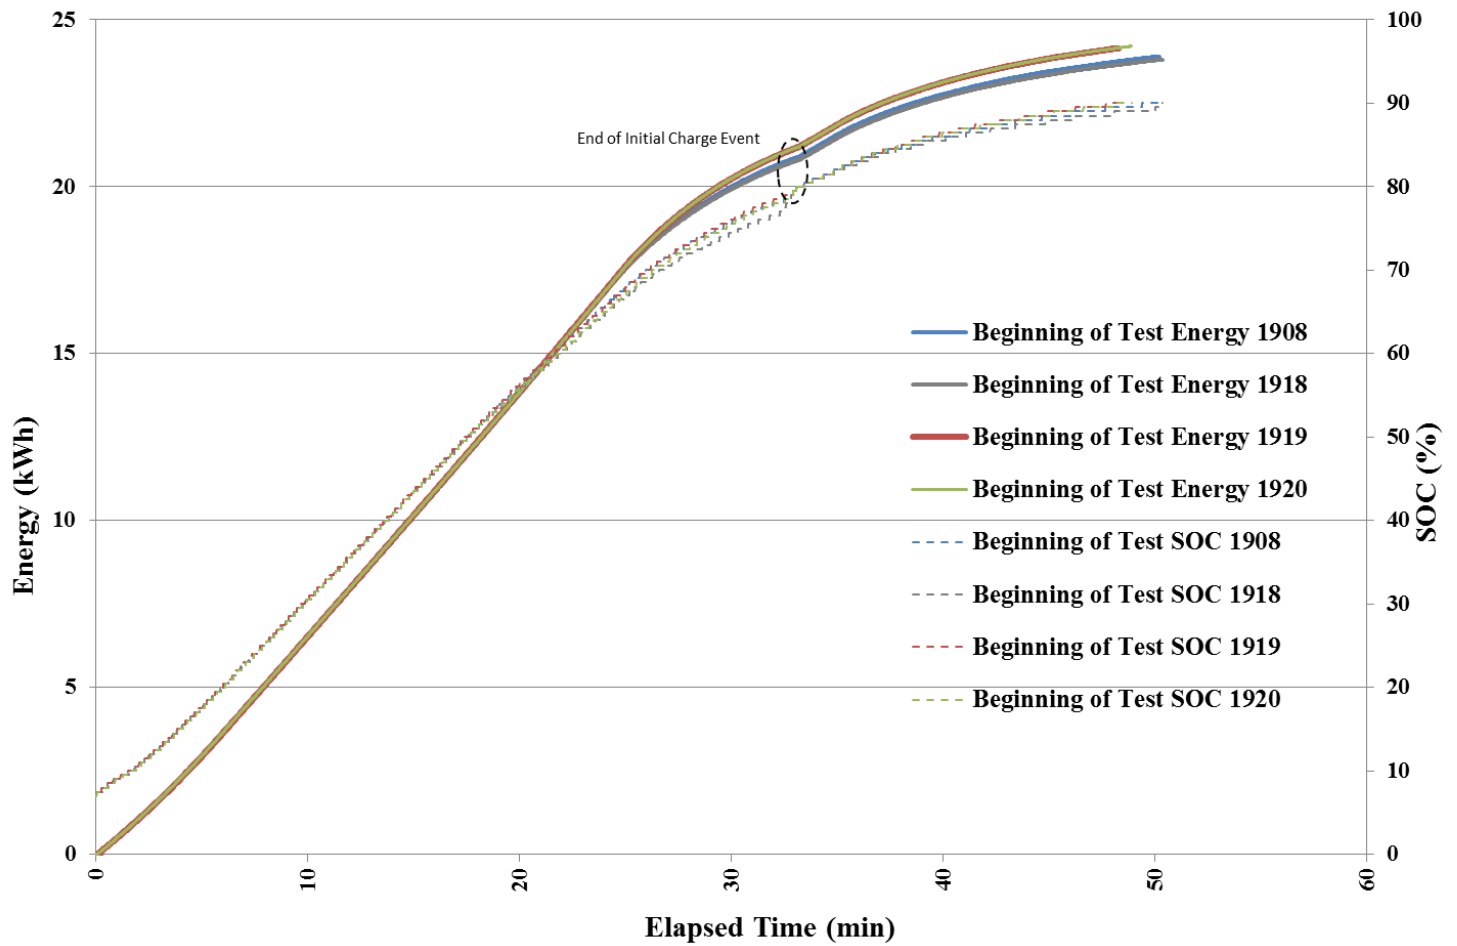


Figure 1a. 0 °C charge energy and SOC versus time

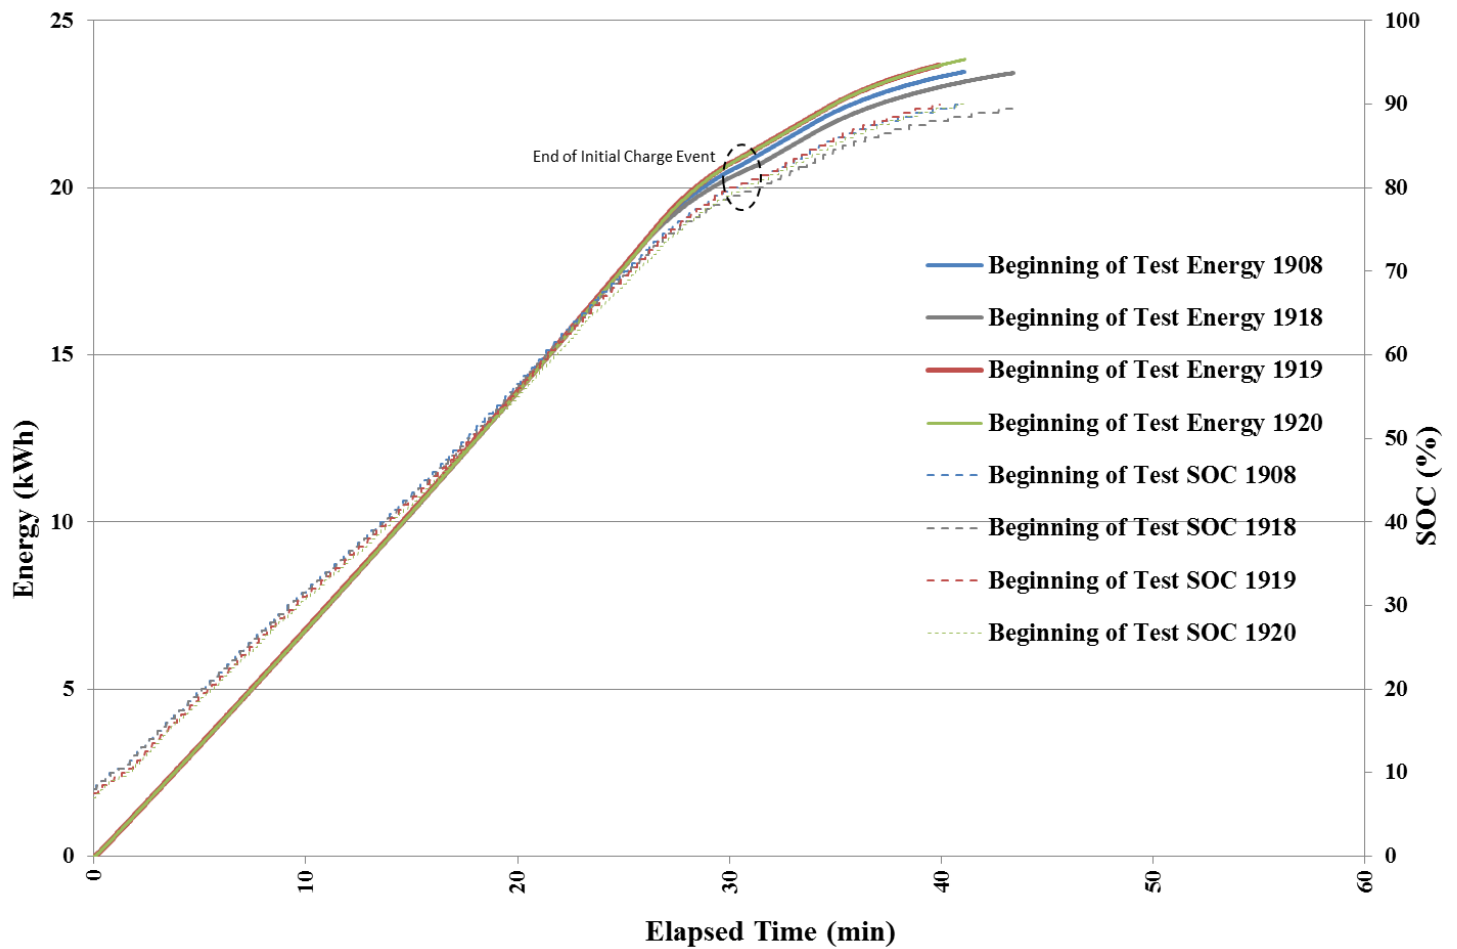


Figure 1b. 25 °C charge energy and SOC versus time

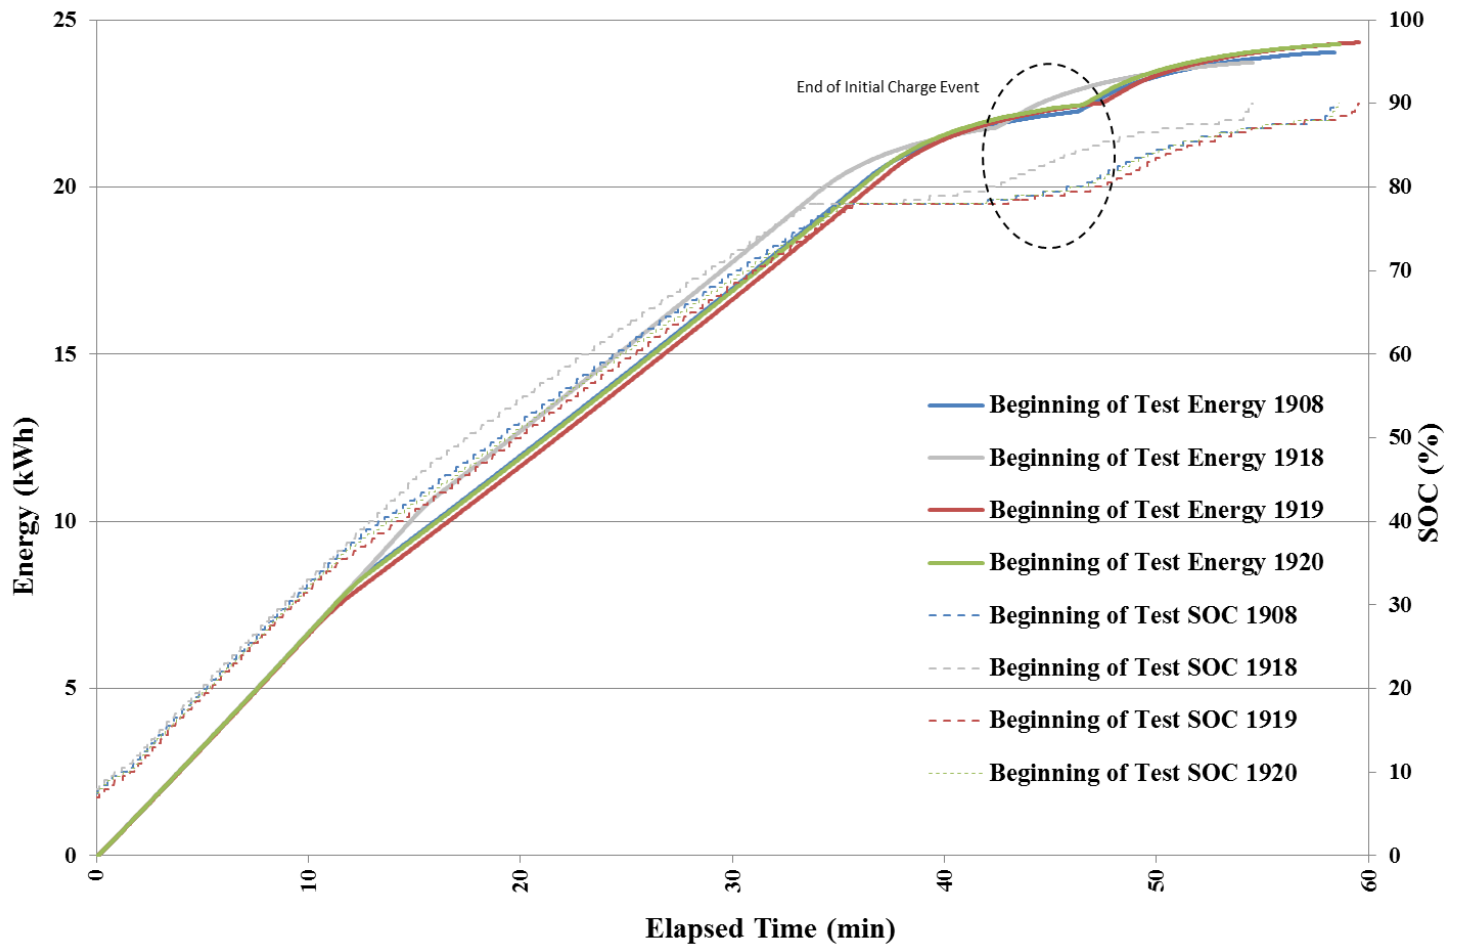


Figure 1c. 50 °C charge energy and SOC versus time

Test Results: Temperatures

Tables 1,2,3 and 4 show the initial, final, and maximum ESS enclosure temperatures of each vehicle's ESS during charging events.

Table 1. VIN 1908 ESS enclosure temperature during BOT test

Test Temperature (°C)	ESS Enclosure Initial Temp. (°C)	ESS Enclosure Final Temp. (°C)	ESS Enclosure Maximum Temp. (°C)
0 °C	1.3	7.8	8.0
25 °C	26.7	29.2	29.5
50 °C	49.5	53.2	53.2

Table 2. VIN 1918 ESS enclosure temperature during BOT test

Test Temperature (°C)	ESS Enclosure Initial Temp. (°C)	ESS Enclosure Final Temp. (°C)	ESS Enclosure Maximum Temp. (°C)
0 °C	1.2	7.9	8.0
25 °C	26.7	29.8	29.8
50 °C	49.4	52.5	52.5

Table 3. VIN 1919 ESS enclosure temperature during BOT test

Test Temperature (°C)	ESS Enclosure Initial Temp. (°C)	ESS Enclosure Final Temp. (°C)	ESS Enclosure Maximum Temp. (°C)
0 °C	1.3	8.4	8.3
25 °C	27.0	30.3	30.3
50 °C	50.2	54.1	54.1

Table 4. VIN 1920 ESS enclosure temperature during BOT test

Test Temperature (°C)	ESS Enclosure Initial Temp. (°C)	ESS Enclosure Final Temp. (°C)	ESS Enclosure Maximum Temp. (°C)
0 °C	0.9	7.7	7.8
25 °C	26.1	29.4	29.5
50 °C	49.9	53.7	53.7

Test Results: Charge Power^{10,11}

Figures 2a, 2b, and 2c show the power at which each vehicle's ESS was being charged for each of the specified temperatures. As before, the end of the initial charge event is denoted by a dashed oval.

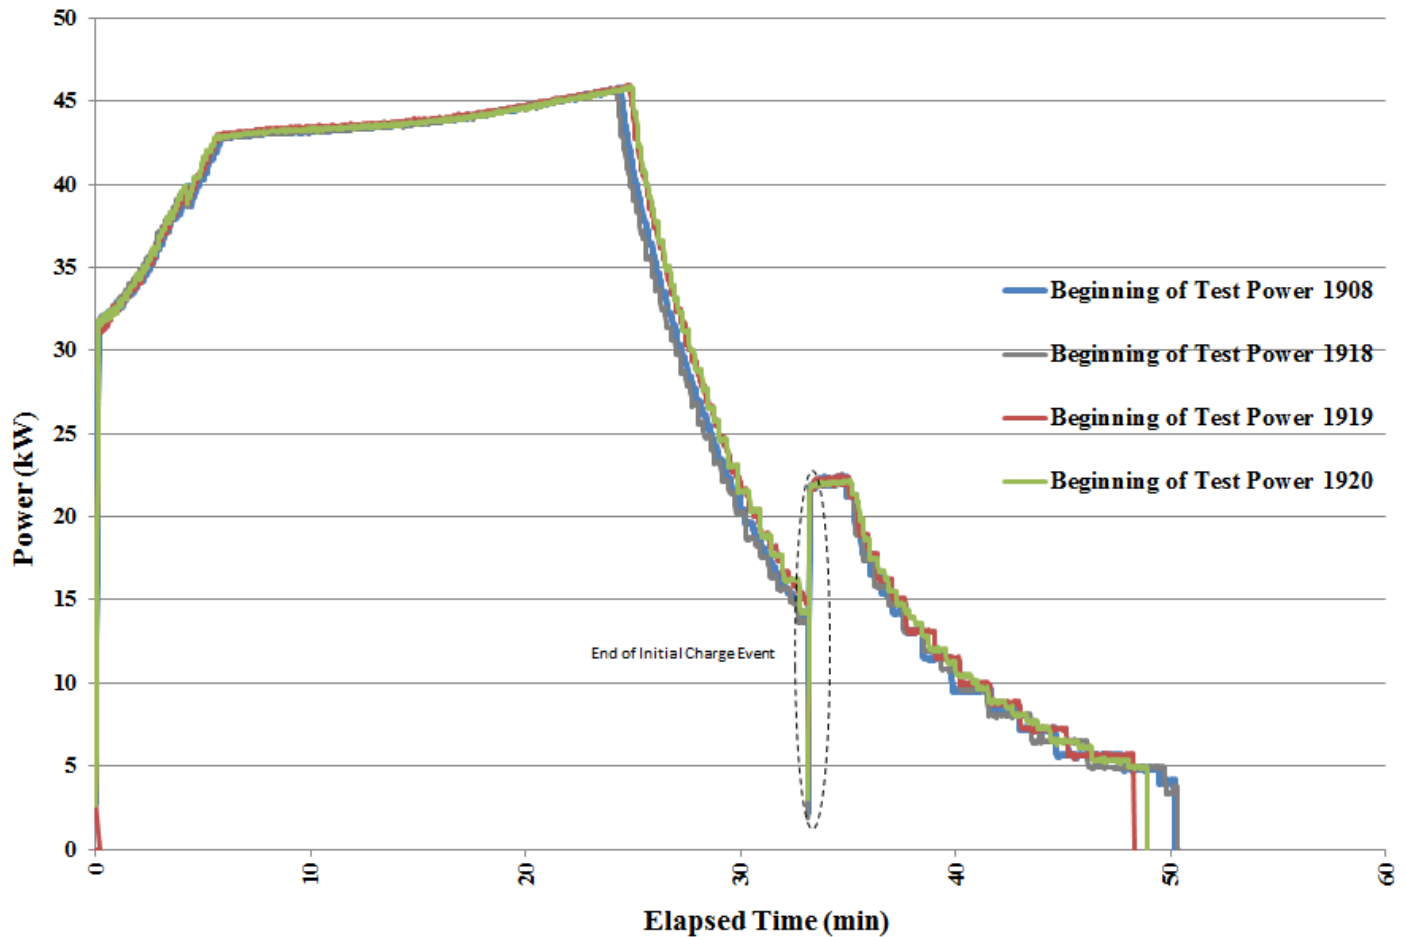


Figure 2a. 0 °C charge power profiles

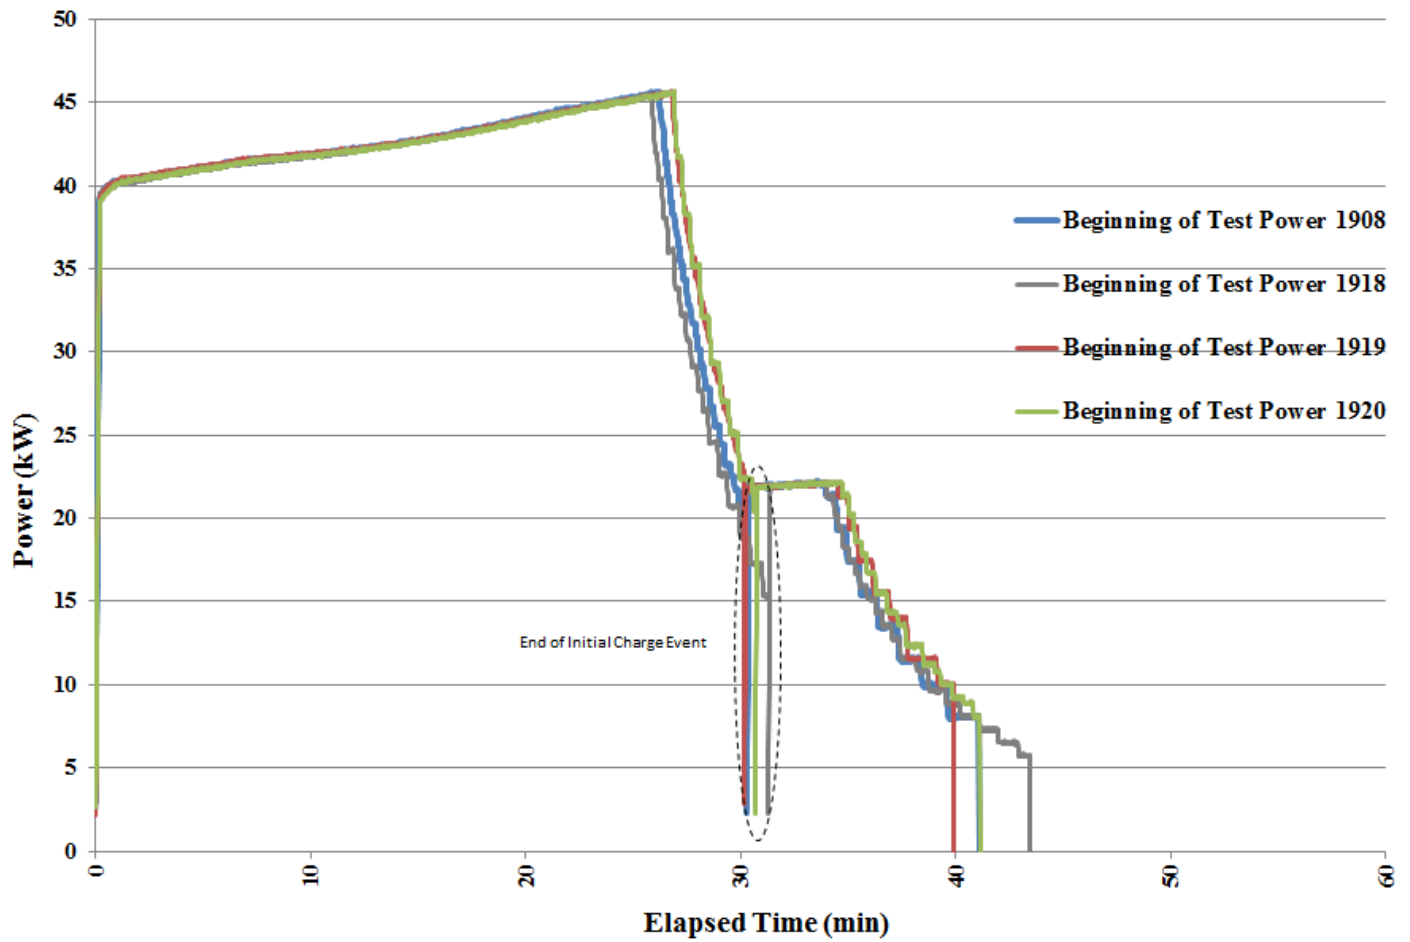


Figure 2b. 25 °C charge power profiles

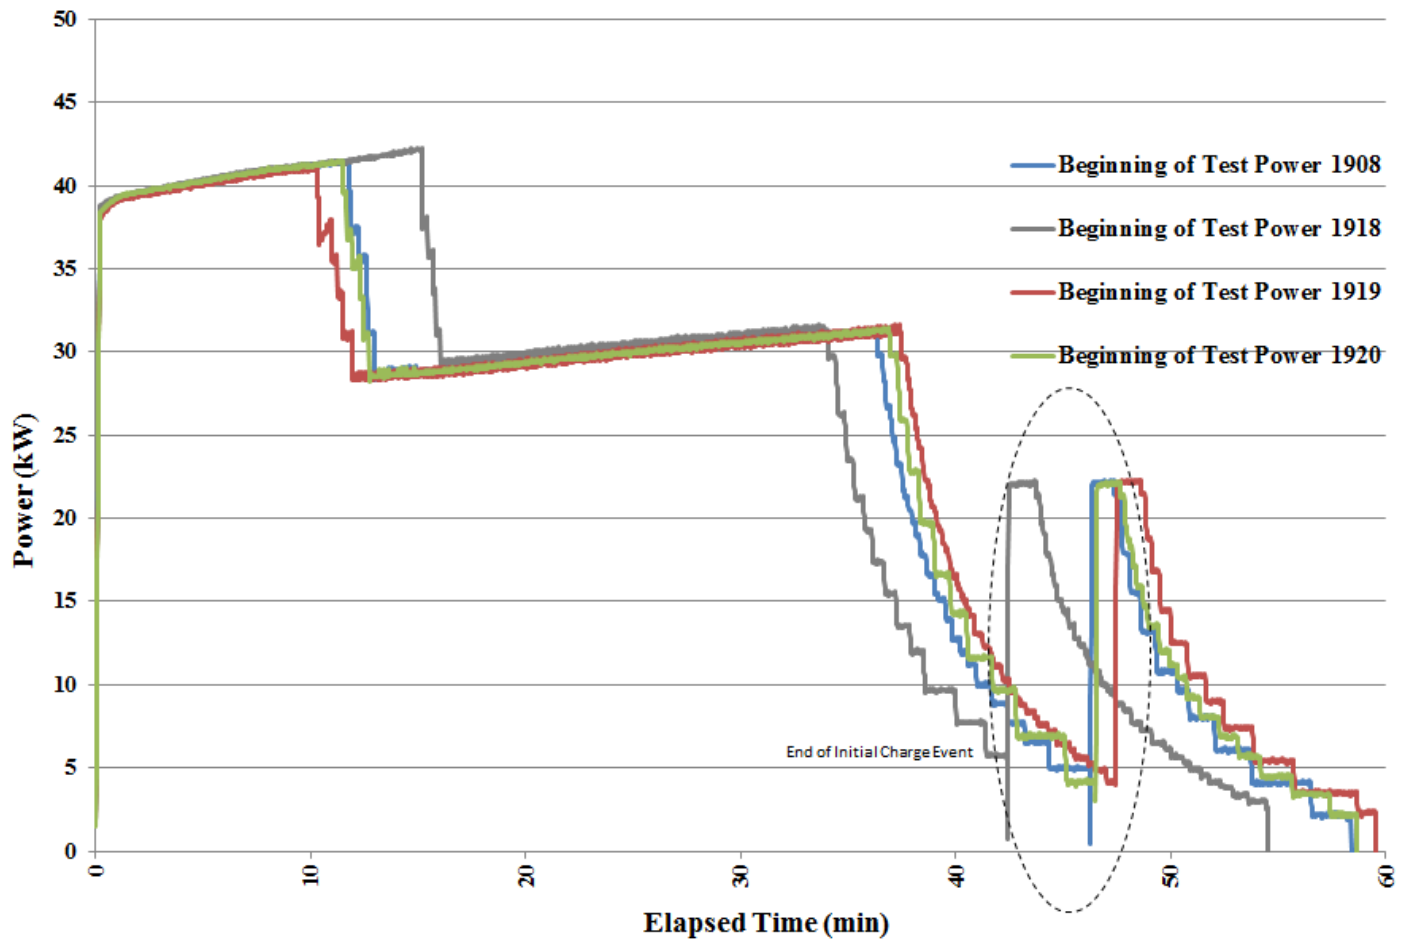


Figure 2c. 50 °C charge power profiles

ADVANCED VEHICLE TESTING ACTIVITY

NOTES:

1. Vehicle, ESS, and DCFC details were either supplied by the manufacturer or derived from a literature review.
2. The Hasetec DCFC was de-rated from 125 A to 120 A for all testing.
3. The ESS SOC is recorded from the vehicle controller area network (CAN) bus. The SOC displayed on the dashboard is also recorded for comparison and corroboration when available. In the case of the Kia Soul EV, the CAN SOC correlates with the SOC revealed by a diagnostic scan tool. Refer to Note 8 for details concerning top-off charge events.
4. The “ESS ΔT During Test” is the difference in the temperature of the ESS between start and end of test. This parameter is calculated using the vehicle CAN message for battery temperature when available. When the CAN message is not available, the ESS enclosure temperature is measured by placing a thermocouple on the top of the battery pack enclosure. In the case of the Kia Soul EV, ESS temperature is not reported via CAN.
5. The thermal regulation load is an approximate calculation of the amount of energy used by the vehicle to regulate ESS temperature, where applicable. This is calculated by subtracting the amount of energy into the ESS from the amount of energy output by the DCFC; the calculated value also includes resistive and conversion electrical losses. In the case of the Kia Soul EV, thermal regulation was engaged during the 50 °C test. However, it is possible that the energy values noted for the 0 °C and 25 °C tests are due to parasitic losses or powering of the vehicle fast charging system. There are three possibilities for how the onboard vehicle electronics receive power during a fast charge: 1) 12 V interface on the CHAdeMO charger, 2) DC-to-DC converter steps high voltage down to 12 V, or 3) the system could be powered directly from the 12 V battery of the vehicle.
6. Each fast charge-capable vehicle is chamber tested three times over the course of its test life. Under normal circumstances for EVs, the temperature chamber testing will take place at the same mileage target as the ESS Beginning of Test (BOT) test at 400 miles. The Middle of Test (MOT) takes place at the same mileage target as the ESS Interim Component Durability 3 (ICD3) test that is conducted at 24,000 miles. Finally, the End of Test (EOT) is conducted at the same mileage target as the ESS EOT test that is conducted at 36,000 miles. In the case of the Kia Soul EV, the decision to run the chamber testing at the same mileage target as the ESS BOT test was made after the ESS Testing had been completed.
7. Each test consists of a soak period deemed sufficient to ensure the vehicle ESS is at the target test temperature; the soak period is a minimum of 21 hours.
8. One top-off charge is conducted per test regardless of the ESS SOC reading at the end of the initial and top-off charge events. The battery management system (BMS) determines the stopping point of the initial and top-off charge events. The dashboard Vehicle Energy Indicator (VEI) for each vehicle at the start/end of each test was as follows:

VIN 1908:			
0 °C: 1 / 18 bars	25 °C: 1 / 18 bars	50 °C: 1 / 18 bars	
VIN 1918:			
0 °C: 1 / 18 bars	25 °C: 1 / 18 bars	50 °C: 1 / 18 bars	
VIN 1919:			
0 °C: 1 / 18 bars	25 °C: 1 / 18 bars	50 °C: 1 / 18 bars	
VIN 1920:			
0 °C: 1 / 18 bars	25 °C: 1 / 18 bars	50 °C: 1 / 18 bars	
9. Time (in seconds) between the end of the initial charge and beginning of the top-off charge is collected for each test. This delay has not been included in the figures.

VIN 1908:			
0 °C: 76 s	25 °C: 30 s	50 °C: 79 s	
VIN 1918:			
0 °C: 68 s	25 °C: 41 s	50 °C: 74 s	
VIN 1919:			
0 °C: 51 s	25 °C: 40 s	50 °C: 140 s	
VIN 1920:			
0 °C: 50 s	25 °C: 58 s	50 °C: 35 s	
10. Maximum charge power for initial and top-off charges:

VIN 1908:			
0 °C: 45.8 / 22.5 kW	25 °C: 45.7 / 22.2 kW	50 °C: 41.5 / 22.3 kW	
VIN 1918:			
0 °C: 45.7 / 22.1 kW	25 °C: 45.5 / 22.2 kW	50 °C: 42.3 / 22.3 kW	
VIN 1919:			
0 °C: 46.0 / 22.5 kW	25 °C: 45.6 / 22.2 kW	50 °C: 41.1 / 22.3 kW	
VIN 1920:			
0 °C: 45.9 / 22.2 kW	25 °C: 45.7 / 22.2 kW	50 °C: 41.5 / 22.2 kW	
11. Voltage at end of initial charge / voltage at end of top-off charge / maximum charge voltage / voltage at initial current drop off:

VIN 1908:			
0 °C: 390.2 / 394.2 / 394.3 / 389.6 V	25 °C: 390.6 / 394.5 / 394.6 / 390.2 V	50 °C: 390.9 / 394.5 / 394.7 / 357.8 V	
VIN 1918:			
0 °C: 390.3 / 394.2 / 394.4 / 389.7 V	25 °C: 390.6 / 394.6 / 394.7 / 390.3 V	50 °C: 390.8 / 394.7 / 394.7 / 364.8 V	
VIN 1919:			
0 °C: 390.3 / 394.4 / 394.4 / 389.8 V	25 °C: 390.6 / 394.6 / 394.6 / 390.3 V	50 °C: 390.9 / 394.7 / 394.8 / 355.5 V	
VIN 1920:			
0 °C: 390.2 / 394.2 / 394.2 / 389.8 V	25 °C: 390.6 / 394.6 / 394.6 / 390.5 V	50 °C: 390.8 / 394.6 / 394.8 / 357.1 V	

This information was prepared with the support of the U.S. Department of Energy (DOE) under Award No. DE-EE0005501. However, any opinions, findings, conclusions or recommendations expressed herein are those of the author(s) and do not necessarily reflect the views of the DOE.