

US Department of Energy and Idaho National Laboratory PHEV Activity Overview

Ohio Rural Electric Cooperatives 2008 Fall
Marketing, Member Services and
Communication Conference

Columbus, OH
November 6, 2008

John Smart

INL/CON-08-15046



US Department of Energy Vehicle Technologies Program PHEV Research and Development Areas

System / component level activities include:

- **Energy storage**
 - **Advanced battery cells, packs and full systems**
 - **Cost, life, low temperature performance, tolerance abuse and safety**
 - **Monitoring of all technologies (capacitors, flywheels, etc)**
- **Power electronics and electric Motors**
 - **Cost, size, thermal control, integrated systems development**
- **Definition of PHEV component requirements**



Li-ion Cells
Photo: Saft




Graphic: GM

US Department of Energy Vehicle Technologies Program PHEV Research and Development Areas

Vehicle Technology Analysis and Evaluation activities include:

- **Modeling and Simulation**
 - Reference Vehicle Definition
 - Analytical Tool Development
 - Technology Verification
- **Integration and Validation**
 - Hardware-in-the-Loop System Integration
 - Technology Validation
- **Laboratory and Field Evaluation**
 - Vehicle / Component Testing
 - Model Validation



US Department of Energy PHEV Testing Partners

Cooperative testing agreements provide access to non-DOE owned PHEVs operating in demonstration fleets. Partners include:

- New York State Energy Research Development Agency (NYSERDA)
- City of Seattle, King County, Port of Seattle, Puget Sound Clean Air Agency
- Tacoma Power
- State of Hawaii
- National Rural Electric Cooperative Association
- University of California-Davis
- PHEV conversion companies
 - Hymotion
 - EnergyCS
 - others



US Department of Energy PHEV Technology Acceleration and Deployment Activity (TADA)

- Funding opportunity for vehicle manufacturers to put prototype PHEVs in field over next three years
- Proposals selected for negotiation from:
 - General Motors
 - Ford Motor Co.
 - Chrysler / General Electric

Idaho National Laboratory

- Eastern Idaho based U.S. Department of Energy (DOE) multi-program laboratory
- 890 square mile site with 3,600 staff
- Support DOE's strategic goal:
 - Increase U.S. energy security and reduce the nation's dependence on foreign oil
- The INL has managed DOE's Advanced Vehicle Test Activity since the late 1980's

Advanced Vehicle Testing Activity (AVTA)

- Part of the U.S. Department of Energy's Vehicle Technologies Program
- INL and Electric Transportation Engineering Corporation (ETEC) conduct the AVTA's light-duty vehicle testing, with Argonne National Laboratory performing dynamometer testing

AVTA Goals

- Determine actual petroleum displacement and overall operating cost of advanced technology vehicles
- Provide benchmark data to industry and government research and development programs
- Assist consumers in making informed vehicle purchase, usage, and operating decisions

AVTA Testing History

- **Plug-in hybrid electric vehicles**
 - 9 models, ~70 vehicles in fleets
- **Hybrid electric vehicles**
 - 14 models, 4+ million test miles
- **Hydrogen ICE (internal combustion engine) vehicles**
 - 6 models, 400,000 test miles
- **Full-size electric vehicles**
 - 40 EV models, 5+ million test miles
- **Neighborhood electric vehicles**
 - 16 models, 200,000 test miles
- **Urban electric vehicles**
 - 3 models, 1 million test miles



PHEV Models Tested by AVTA

Nine different PHEV models are in or have completed various testing / demonstration activities

- Hymotion Prius
- EnergyCS Prius
- Hymotion Escape
- HybridsPlus Escape
- HybridsPlus Prius
- Manzanita lead acid Prius
- Electrovaya Escape
- Ford E85 Escape
- Renault Kangoo

- Daimler Sprinter expected to start testing in Spring 2009

PHEV Testing Objectives

Perform independent testing of PHEVs using:

- **Baseline performance testing**
 - closed test tracks and dynamometers
- **Accelerated on-road testing**
 - dedicated drivers operating on defined routes
- **Fleet testing**
 - monitor everyday uncontrolled use with onboard data loggers
- **Lab and field off-board charging / grid interaction studies**

PHEV Testing Objectives

Study and document

- How the vehicles are driven
- How the vehicles are charged
- The effect on
 - Gasoline and electricity fuel use
 - Battery life
 - Facility / grid demand and energy profiles
- Charging infrastructure requirements
- Cost / benefit of fast charging, vehicle-to-grid charging
- Overall PHEV life-cycle costs

PHEV Baseline Performance Testing

- These and other test results at <http://avt.inl.gov>

PHEVAMERICA
 U.S. DEPARTMENT OF ENERGY ADVANCED VEHICLE TESTING ACTIVITY

Base Vehicle Description
 Make: Toyota
 Model: Prius Year: 2006
 VIN: JTDKB20U767508841
 Number of Passengers: 5
 Hybrid Configuration: Series/Parallel

Energy CS Plug-In Hybrid

VEHICLE SPECIFICATIONS

Weights
 Design Curb Weight: 3160
 Vehicle Test Weight: 3400 lbs
 GVWR: 3795 lbs
 GAWR F/R: 2335/2250
 Distribution: 54.2%/45.8%
 Payload: 635 lbs
 Performance Goal: 400 lbs

Electric Drive System
 Battery Manufacturer: Valence
 Battery Type: Li-Ion
 Number of Cells: 2376
 Nominal Cell Voltage: 3.2V
 Nominal System Voltage: 230.4V
 Nominal Pack Capacity: 10 kWh
 Measured Usable Capacity: 4.88 kWh

Charge System:
 Input Voltages: 120V
 Required Breaker Currents: 1.5-Amp
 Charger Power Output: 1.2 kW
 Charger Plug Type: NEMA 5-15
 Fuel Tank Capacity: 11.9 gal
 Fuel Types: Unleaded

VEHICLE TEST RESULTS

Charge Depleting:
 Acceleration 0-60 MPH
 Time: 12.96 seconds
Acceleration 1/4 Mile
 Time: 20.09 seconds
 Maximum Speed: 75.7 MPH
Acceleration 1 Mile
 Maximum Speed: 104.9 MPH
Charge Sustaining:
 Acceleration 0-60 MPH
 Time: 12.82 seconds
Acceleration 1/4 Mile
 Time: 19.98 seconds
 Maximum Speed: 75.7 MPH
Acceleration 1 Mile
 Maximum Speed: 105.0 MPH
Brake Test @ 60 MPH
 Distance Required: 126.8 ft

Fuel Economy with A/C Off¹
 Cold Start Charge Depleting:
 Fuel Economy: 108.2 MPG
 A/C kWh Consumed²: .169 kWh/mi
Charge Depleting:
 Average Fuel Economy: 149.1 MPG
 A/C kWh Consumed²: .153 kWh/mi
Charge Sustaining:
 Fuel Economy: 60 MPG

Fuel Economy with A/C On^{1,3}
 Cold Start Charge Depleting:
 Fuel Economy: 101.7 MPG
 A/C kWh Consumed²: .201 kWh/mi
Charge Depleting:
 Average Fuel Economy: 138.4 MPG
 A/C kWh Consumed²: .194 kWh/mi
Charge Sustaining:
 Fuel Economy: 43 MPG

UDDS Fuel Economy ⁴			HWFET Fuel Economy ⁴		
Distance (miles)	Fuel Economy (mpg)	A/C Energy Consumed (kWh)	Distance (miles)	Fuel Economy (mpg)	A/C Energy Consumed (kWh)
10	118.0	1.83	10	106.6	1.77
20	137.6	3.65	20	116.4	3.45
40	124.7	5.52	40	99.9	5.46
60	105.9	5.65	60	86.7	5.84
80	94.7	5.65	80	79.5	5.93
100	89.18	5.65	100	75.2	5.93
200	77.9	5.65	200	66.6	5.93

TEST NOTES:
 1. Calculated fuel economy over EPA standard urban drive cycle.
 2. Values tested at sub-optimum vehicle O2 for a duration of 12 hours prior to testing.
 3. Average non-cold start charge depletion fuel economy.
 4. Value determined from average charge including fuel economy tests with appropriate energy correct calculation.
 5. A/C on cold start setting with full battery power.
 6. Calculated overall fuel economy values, includes cold start.
 7. A/C energy based on measured charge efficiency.

This vehicle meets all HEV America Minimum Requirements listed on back of this sheet.
 Values in red indicate the Performance Goal was not met. All Power and Energy values are DC unless otherwise specified.

© 2007 Electric Transportation Applications. All Rights Reserved.

PHEVAMERICA
 U.S. DEPARTMENT OF ENERGY ADVANCED VEHICLE TESTING ACTIVITY

Base Vehicle Description
 Make: Toyota
 Model: Prius Year: 2007
 VIN: JTDKB20U577558820
 Number of Passengers: 5
 Hybrid Configuration: Series/Parallel

Hymotion Plug-In Hybrid

VEHICLE SPECIFICATIONS

Weights
 Design Curb Weight: 3037
 Vehicle Test Weight: 3337 lbs
 GVWR: 3795 lbs
 GAWR F/R: 2335/2250
 Distribution: 54.2%/45.8%
 Payload: 758 lbs
 Performance Goal: 400 lbs

Electric Drive System
 Battery Manufacturer: A123
 Battery Type: Li-Ion
 Number of Cells: 616
 Nominal Cell Voltage: 3.2V
 Nominal System Voltage: 184.8V
 Nominal Pack Capacity: 4.7 kWh
 Measured Usable Capacity: 2.96 kWh

Charge System:
 Input Voltages: 120V
 Required Breaker Currents: 1.5-Amp
 Charger Power Output: 1.2 kW
 Charger Plug Type: NEMA 5-15
 Fuel Tank Capacity: 11.9 gal
 Fuel Types: Unleaded

VEHICLE TEST RESULTS

Charge Depleting:
 Acceleration 0-60 MPH
 Time: 13.28 seconds
Acceleration 1/4 Mile
 Time: 20.27 seconds
 Maximum Speed: 74.34 MPH
Acceleration 1 Mile
 Maximum Speed: 103.4 MPH
Charge Sustaining:
 Acceleration 0-60 MPH
 Time: 13.41 seconds
Acceleration 1/4 Mile
 Time: 20.42 seconds
 Maximum Speed: 74.82 MPH
Acceleration 1 Mile
 Maximum Speed: 104.0 MPH
Brake Test @ 60 MPH
 Distance Required: 153.0 ft

Fuel Economy with A/C Off¹
 Cold Start Charge Depleting:
 Fuel Economy: 146.72 MPG
 A/C kWh Consumed²: .147 kWh/mi
Charge Depleting:
 Average Fuel Economy: 167.2 MPG
 A/C kWh Consumed²: .148 kWh/mi
Charge Sustaining:
 Fuel Economy: 60.8 MPG

Fuel Economy with A/C On^{1,5}
 Cold Start Charge Depleting:
 Fuel Economy: 128.9 MPG
 A/C kWh Consumed²: .199 kWh/mi
Charge Depleting:
 Average Fuel Economy: 153.2 MPG
 A/C kWh Consumed²: .197 kWh/mi
Charge Sustaining:
 Fuel Economy: 46.5 MPG

UDDS Fuel Economy ⁴			HWFET Fuel Economy ⁴		
Distance (miles)	Fuel Economy (mpg)	A/C Energy Consumed (kWh)	Distance (miles)	Fuel Economy (mpg)	A/C Energy Consumed (kWh)
10	154.8	1.65	10	87.48	1.30
20	160.3	3.31	20	95.27	2.64
40	117.4	3.58	40	86.11	3.92
60	99.40	3.58	60	75.79	3.92
80	88.88	3.58	80	70.52	3.92
100	83.71	3.58	100	67.36	3.92
200	72.26	3.58	200	61.05	3.92


TEST NOTES:
 1. Calculated fuel economy over EPA standard urban drive cycle.
 2. Values tested at sub-optimum vehicle O2 for a duration of 12 hours prior to testing.
 3. Average non-cold start charge depletion fuel economy.
 4. Value determined from average charge including fuel economy tests with appropriate energy correct calculation.
 5. A/C on cold start setting with full battery power.
 6. Calculated overall fuel economy values, includes cold start.
 7. A/C energy based on measured charge efficiency.

This vehicle meets all HEV America Minimum Requirements listed on back of this sheet.
 Values in red indicate the Performance Goal was not met. All Power and Energy values are DC unless otherwise specified.

© 2007 Electric Transportation Applications. All Rights Reserved.


Toyota Prius with Hymotion PHEV conversion – EPA City Test

- 5 kWh A123Systems (Li-ion) v1 and Prius packs (NiMH)

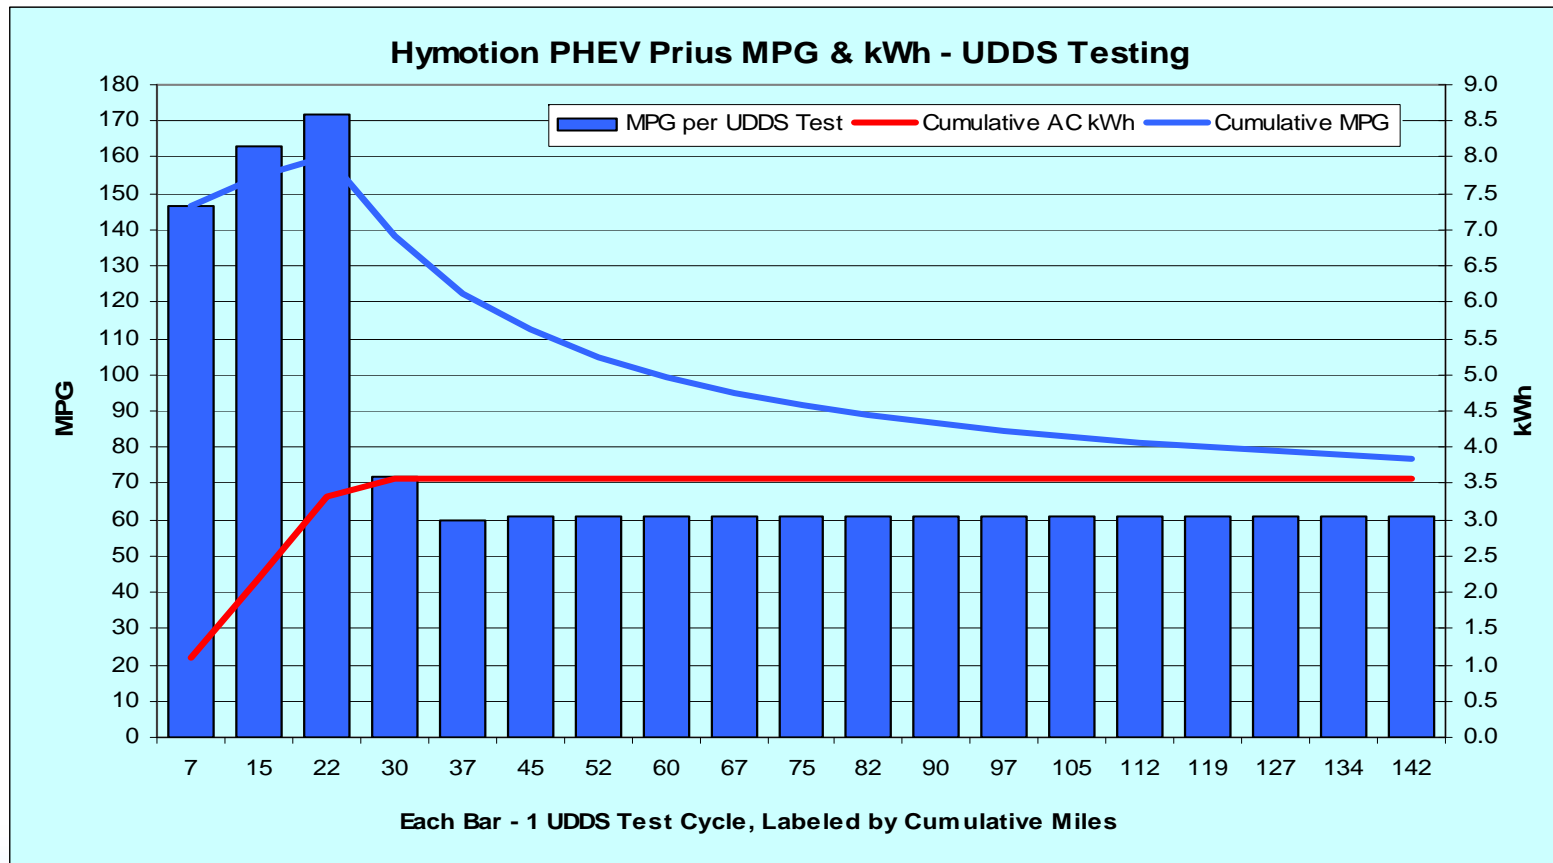

Toyota Prius with Hymotion PHEV conversion – EPA Highway Test

- 5 kWh A123Systems (Li-ion) v1 and Prius packs (NiMH)

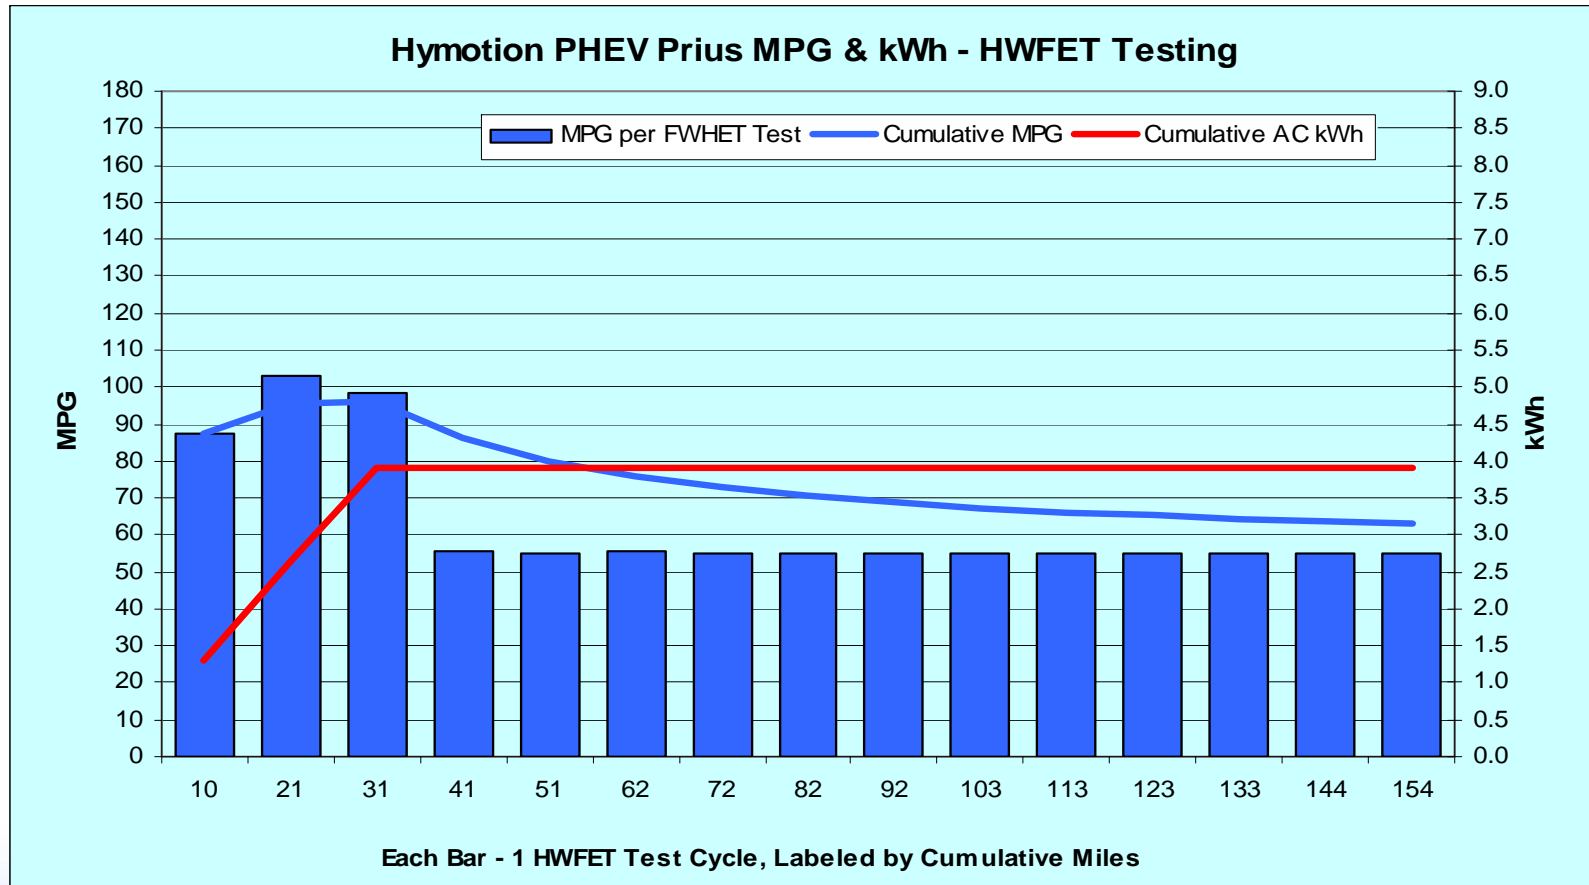


Hymotion Prius – On-road Accelerated Testing

Cycle (mi)	Urban (10 mi)	Highway (10 mi)	Charge (hr)	Reps (N)	Total (mi)	Electricity AC kWh	Gasoline	
							Gal	MPG
10	1	0	4	60	600	136.33	4.81	127.2
20	1	1	8	30	600	122.02	5.37	115.9
40	4	0	12	15	600	84.10	6.05	101.1
40	2	2	12	15	600	87.22	5.78	106.9
40	0	4	12	15	600	79.82	8.54	73.1
60	2	4	12	10	600	55.33	8.98	68.9
80	2	6	12	8	640	43.99	11.36	58.3
100	2	8	12	6	600	35.98	8.43	73.2
200	2	18	12	3	600	15.0	11.02	54.8
Total	2540	3100	1404	167	5,440	Weighted Average		79.5

Each total distance slightly greater than 600
and 640 miles. HEV version = 44 mpg


Ford Escape Hybrid with HybridsPlus PHEV conversion – EPA City Test

- 10 kWh A123Systems (Li-ion)

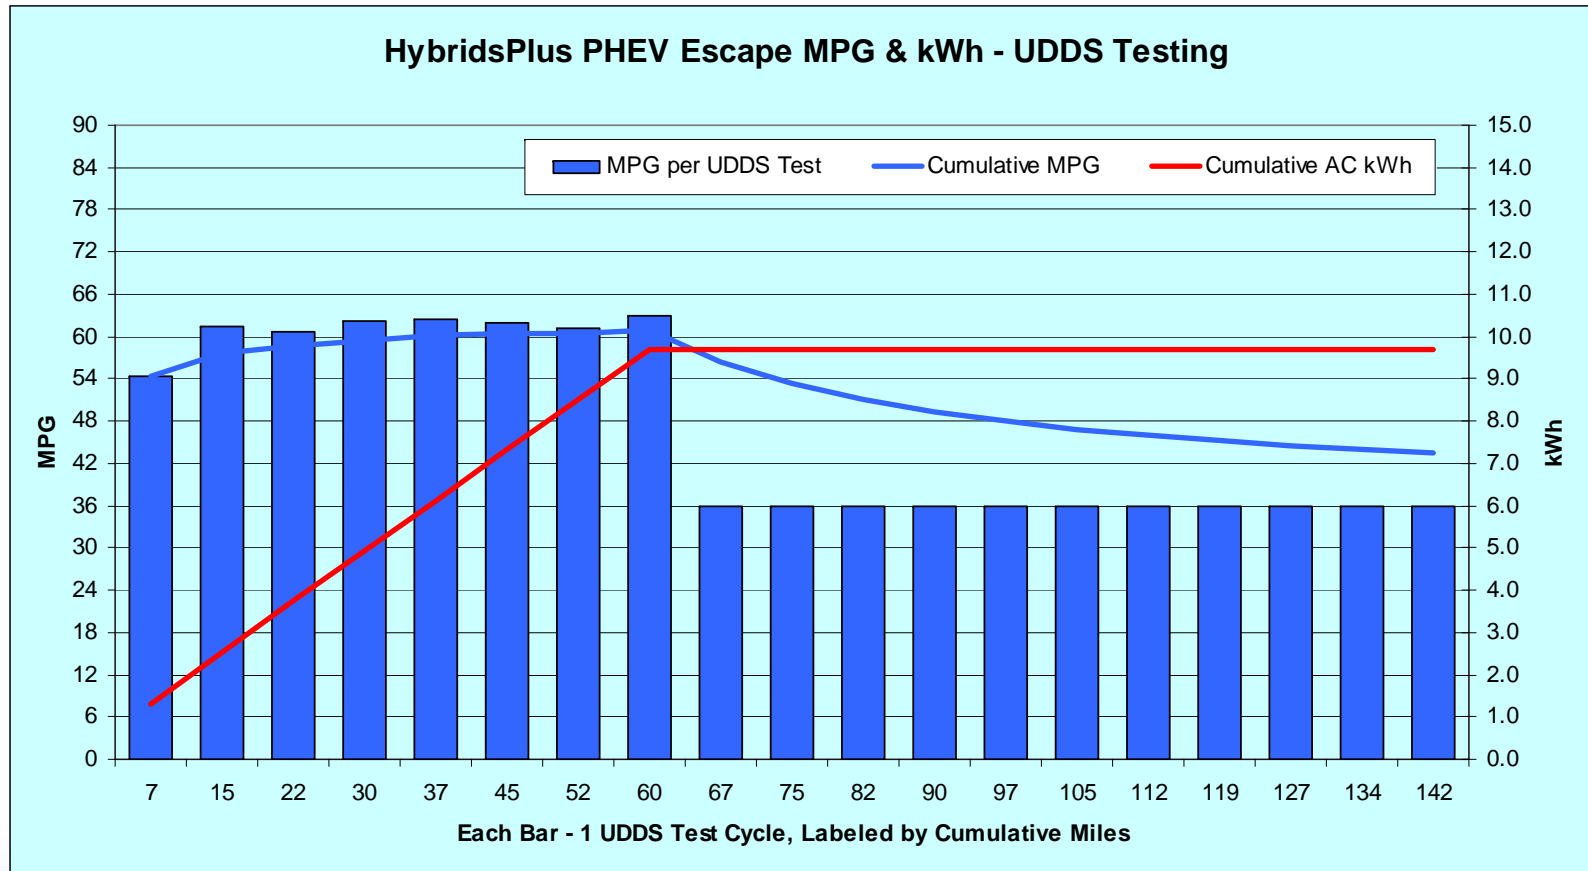


Ford Escape Hybrid with HybridsPlus PHEV conversion – EPA Highway Test

- 10 kWh A123Systems (Li-ion)

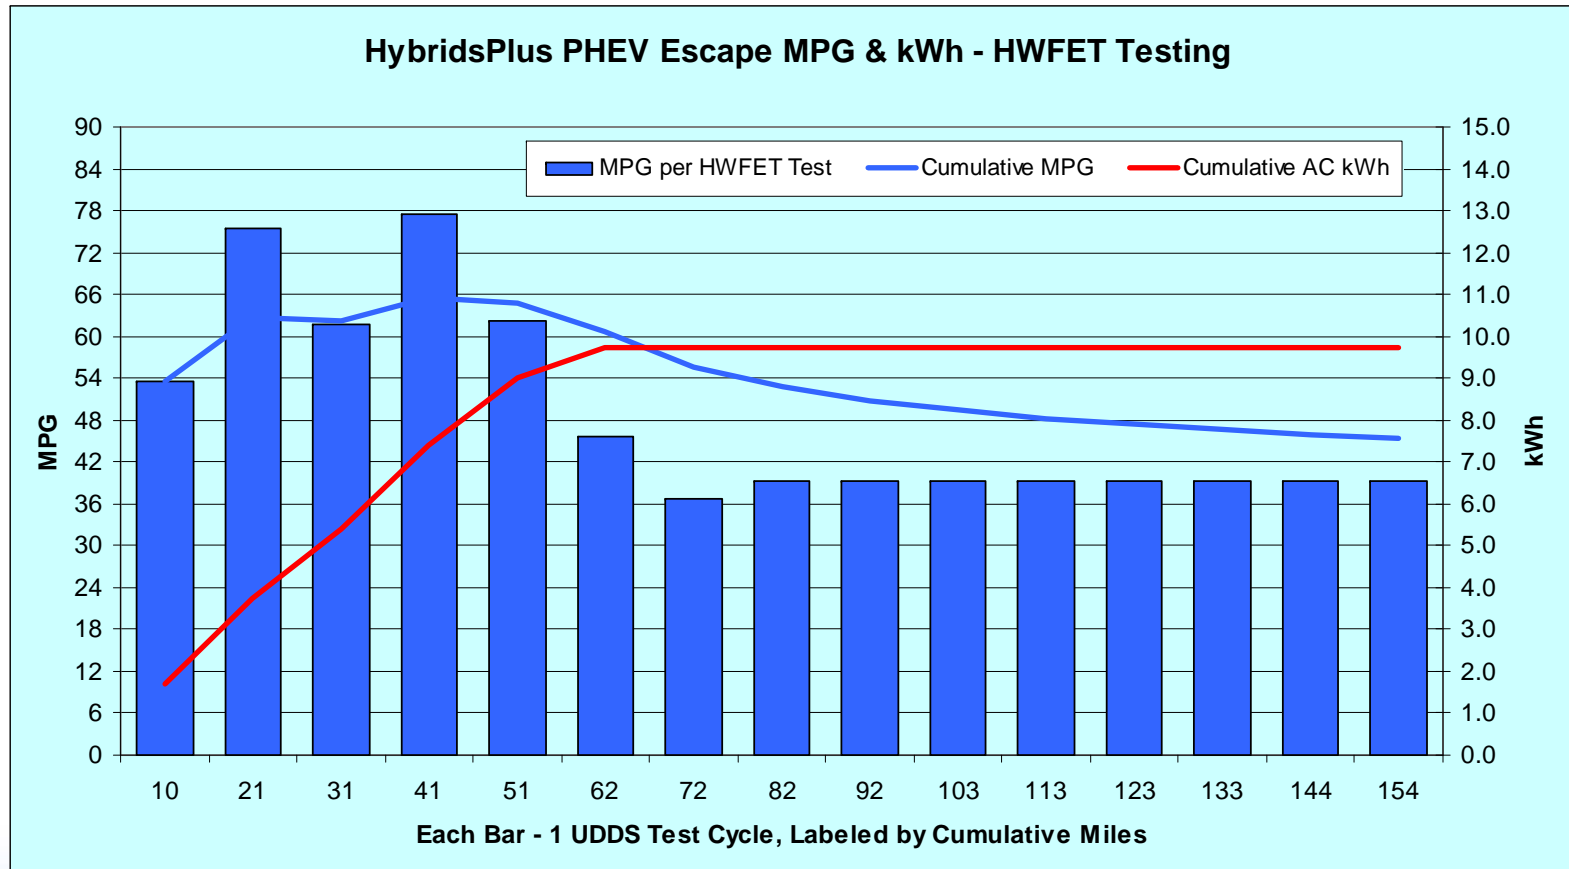


Ford Escape Hybrid with Hymotion PHEV conversion – EPA City Test

- 8.5 kWh A123Systems (Li-ion) and Escape packs (NiMH)

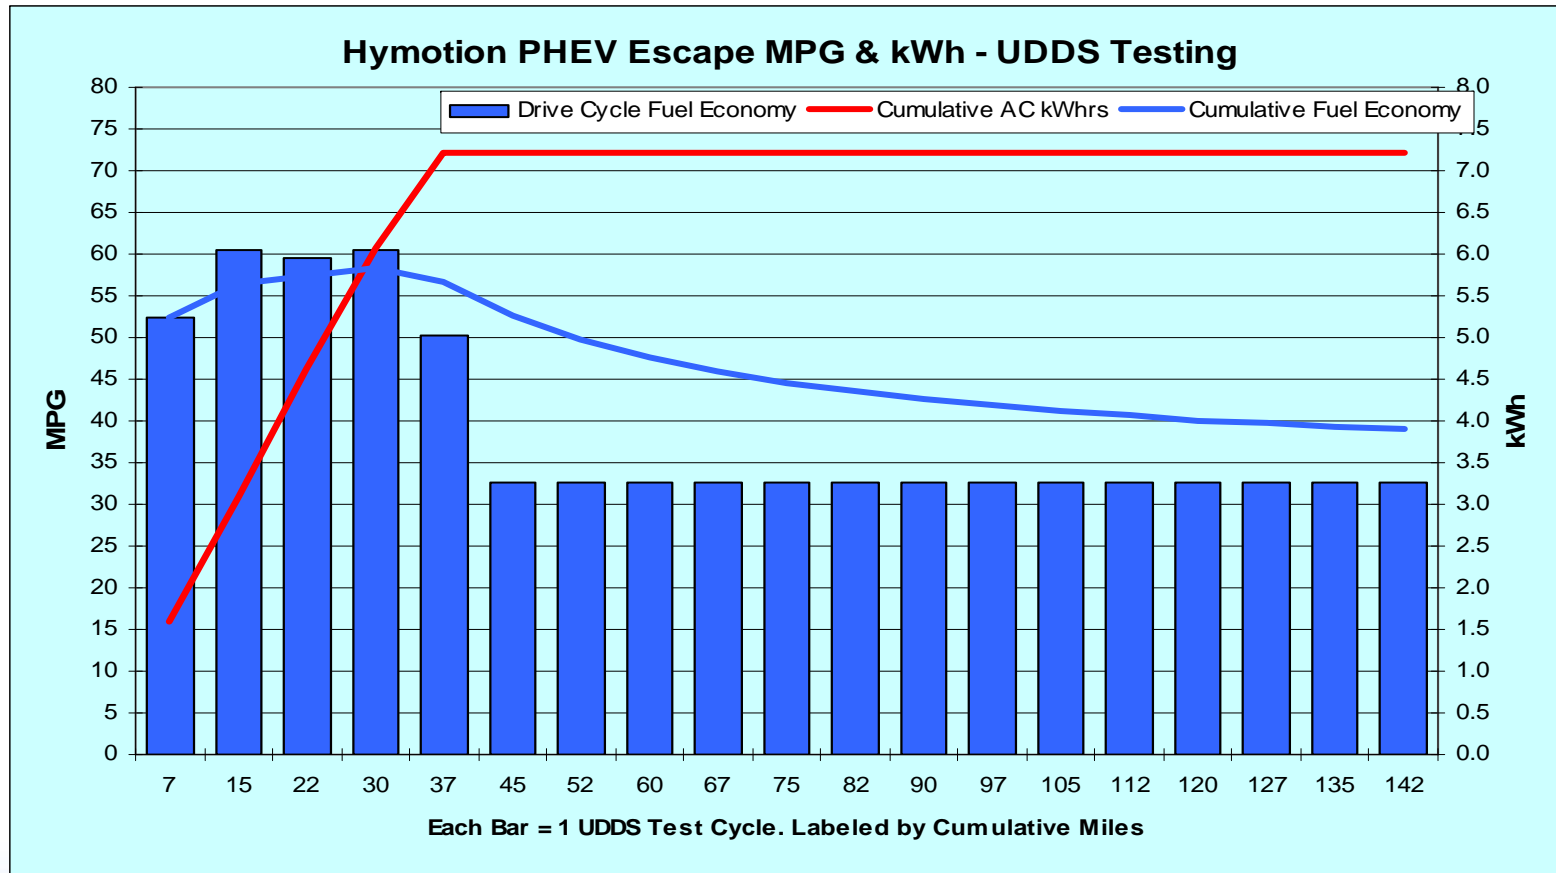

Ford Escape Hybrid with Hymotion PHEV conversion – EPA Highway Test

- 8.5 kWh A123Systems (Li-ion) and Escape packs (NiMH)

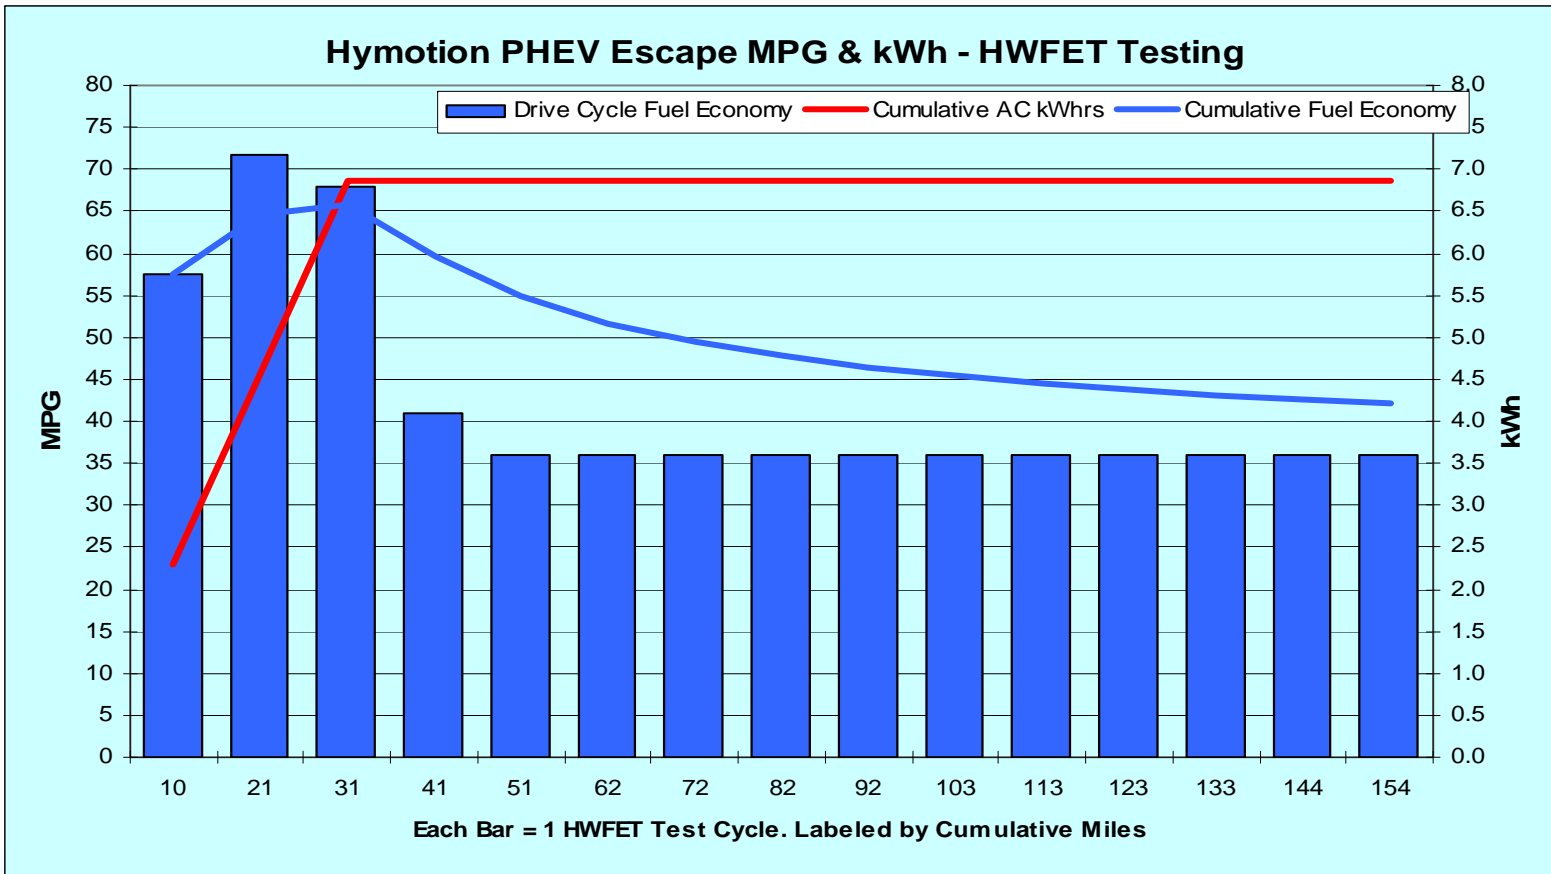


Hymotion Escape – Accelerated Testing

Cycle (mi)	Urban	Highway	Charge	Reps	Total	Electricity	Gasoline	
	(10 mi)	(10 mi)	(hr)	(N)	(mi)	AC kWh	Gals	MPG
10	1	0	4	60	600	Testing		
20	1	1	8	30	600	163.29	13.51	45.7
40	4	0	12	15	600	57.51	14.91	41.1
40	2	2	12	15	600	76.29	15.99	38.7
40	0	4	12	15	600	114.14	11.92	51.5
60	2	4	12	10	600	97.18	13.70	45.3
80	2	6	12	8	640	77.69	16.05	41.3
100	2	8	12	6	600	58.64	15.69	39.8
200	2	18	12	3	600	26.09	17.72	33.5
Total	2340	3100	1344	162	5440	Weighted Average		

Each total distance slightly greater than 600 miles. HEV version = 27 mpg

PHEVs and Demonstration Locations

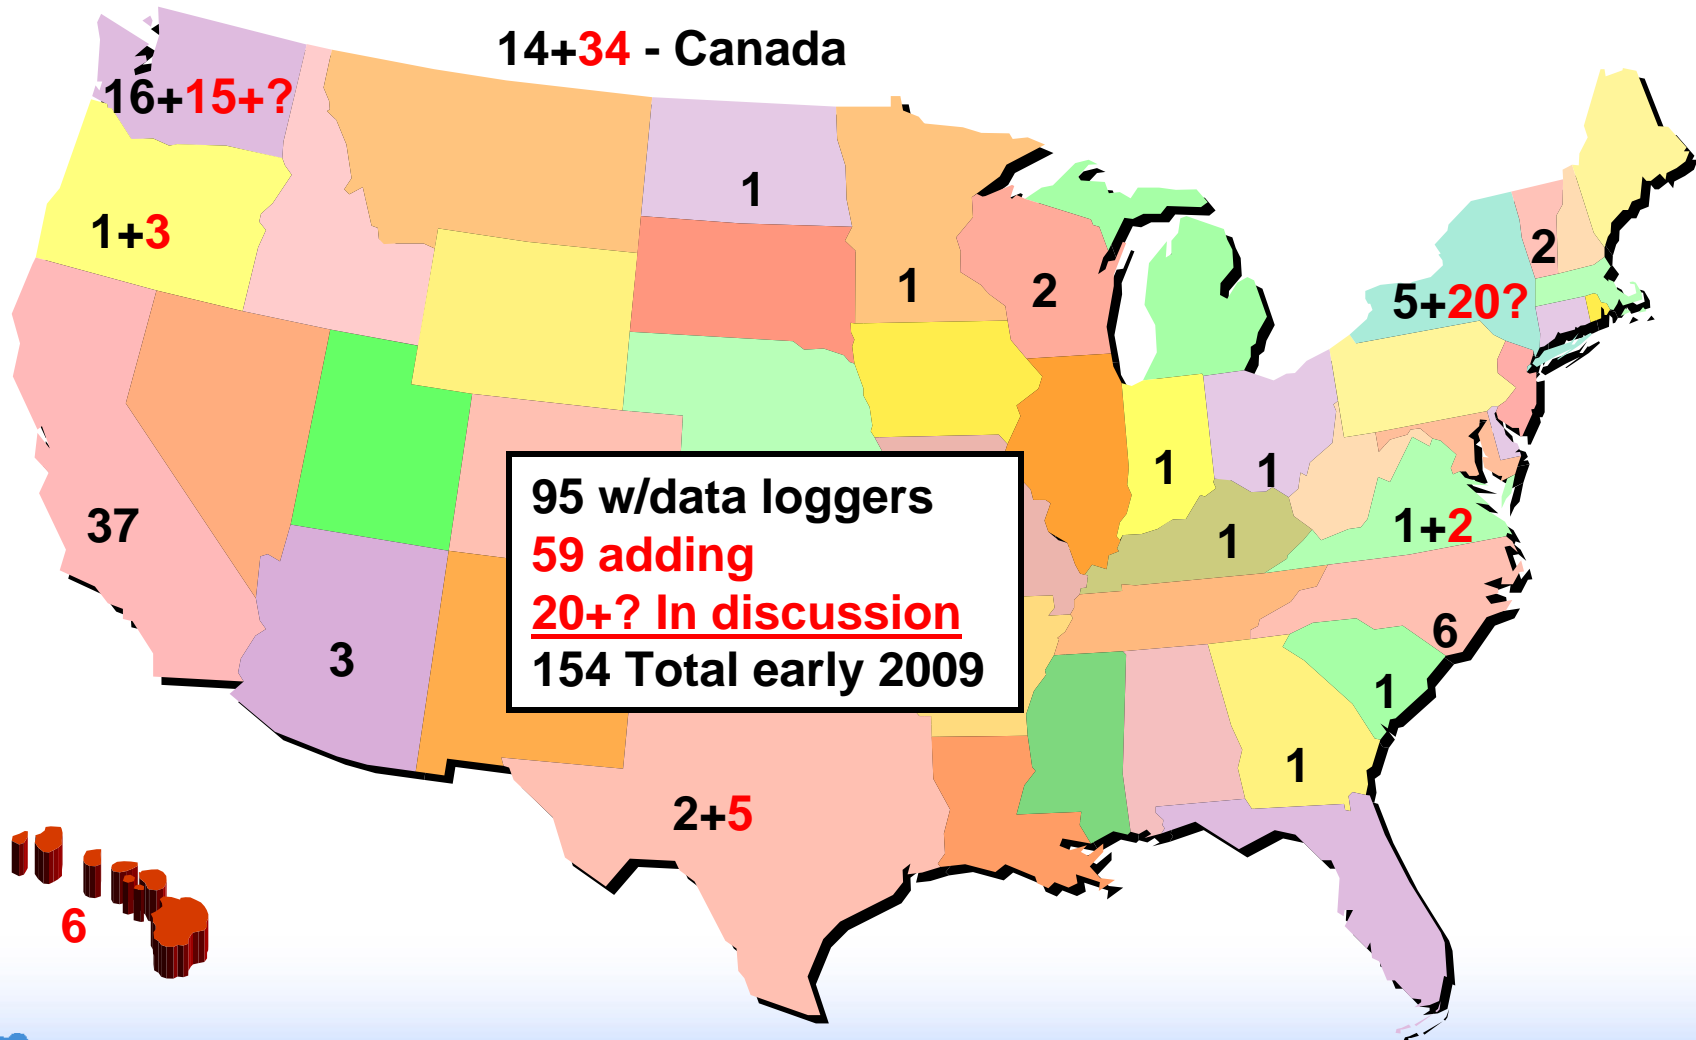

Onroad Demonstration and Data Collection Partners


- **~75 Testing partners in the U.S. and Canada, including:**
 - **36 Electric utilities (some via NRECA)**
 - **6 City governments**
 - **2 County governments**
 - **2 State governments**
 - **8 Universities and colleges**
 - **2 Clean air agencies**
 - **7 Private companies and advocacy organizations**
 - **3 Governments of Canadian provinces**
 - **2 Sea ports and U.S. military organizations**
 - **2 PHEV conversion companies**




PHEV Fleet Performance

- Data sampled from 28 Hymotion Prius vehicles
- Jan – Jun 2008
- 58,005 miles

Comined Fleet Cumulative Gasoline
Fuel Economy by Trip Type

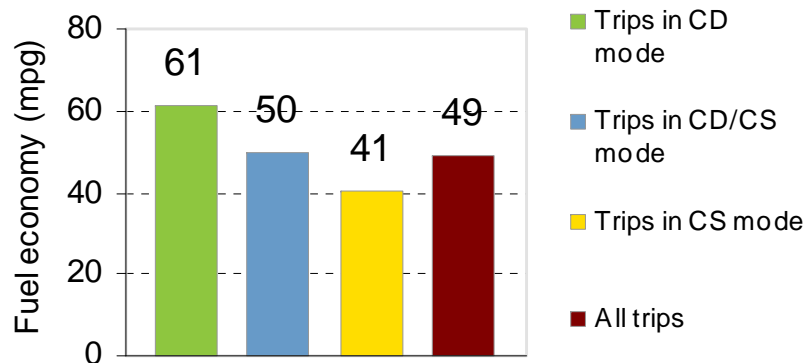

Distance Traveled by Trip Type

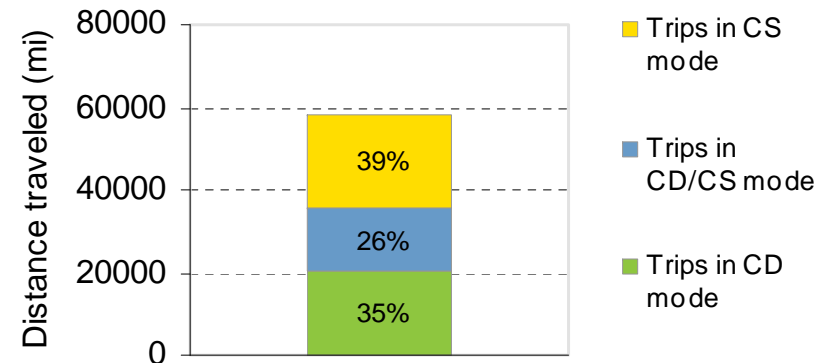


CD = Charge depleting
CS = Charge sustaining


PHEV Fleet Performance

- Data sampled from 4 conversion Escapes
 - 2 HybridsPlus, 2 Hymotion
- Jan – Aug 2008: 17,019 miles

Combined Fleet Cumulative Gasoline Fuel Economy by Trip Type

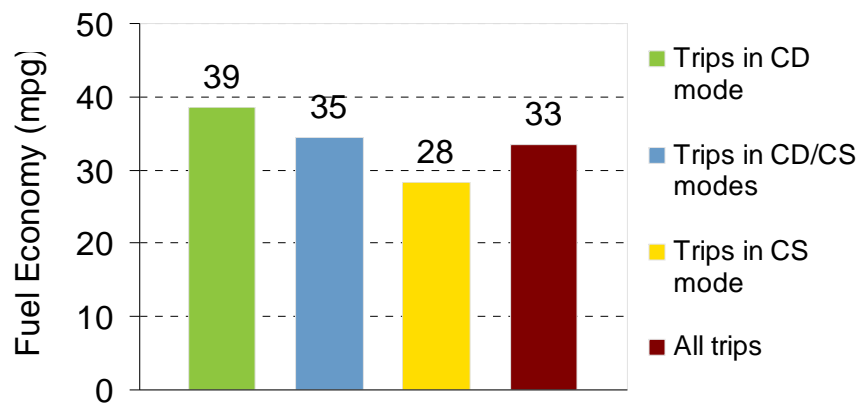


Distance Traveled by Trip Type

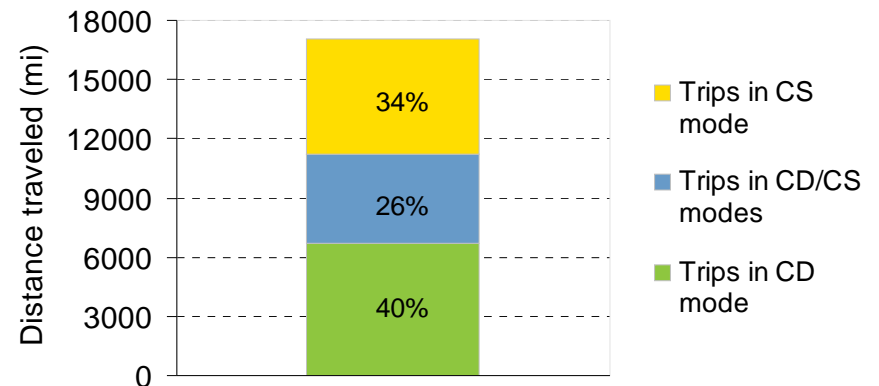

CD = Charge depleting
CS = Charge sustaining


PHEV Fleet Performance

- Same 28 Hymotion Priuses, Jan – Jun 2008
- Range of monthly vehicle fuel economy results:

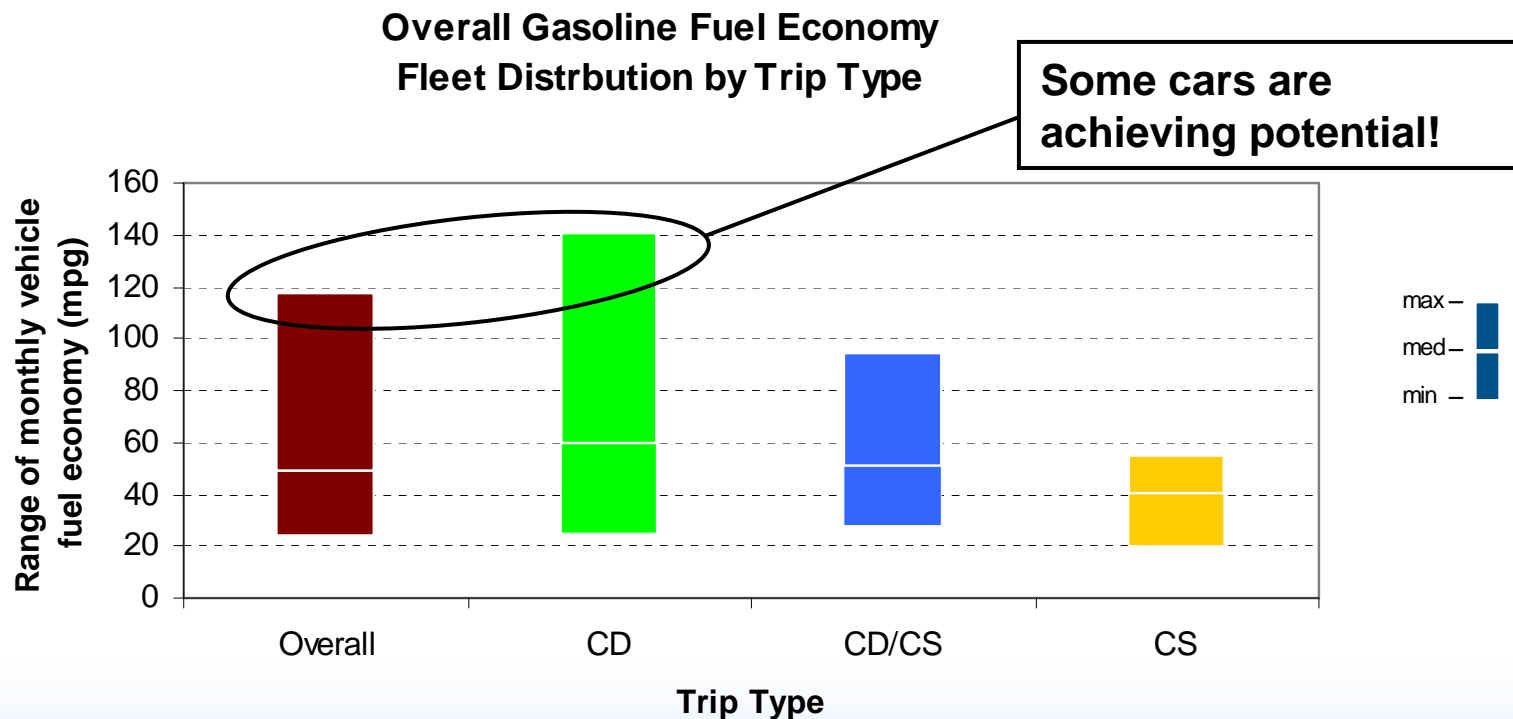


PHEV Fleet Performance

- Same 4 Escapes, Jan – Aug 2008
- Range of monthly vehicle fuel economy results:

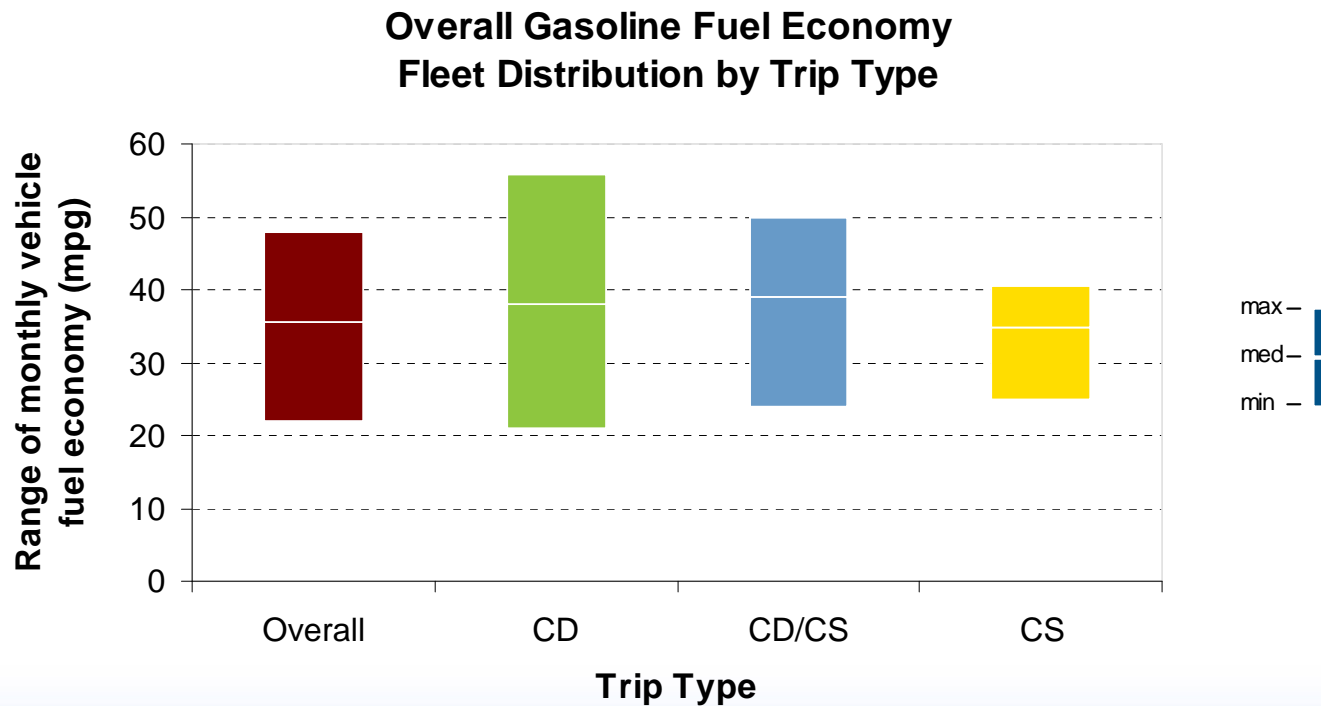

PHEV Fleet Performance

- Same 28 Hymotion Priuses, Jan – Jun 2008
- Charging energy:

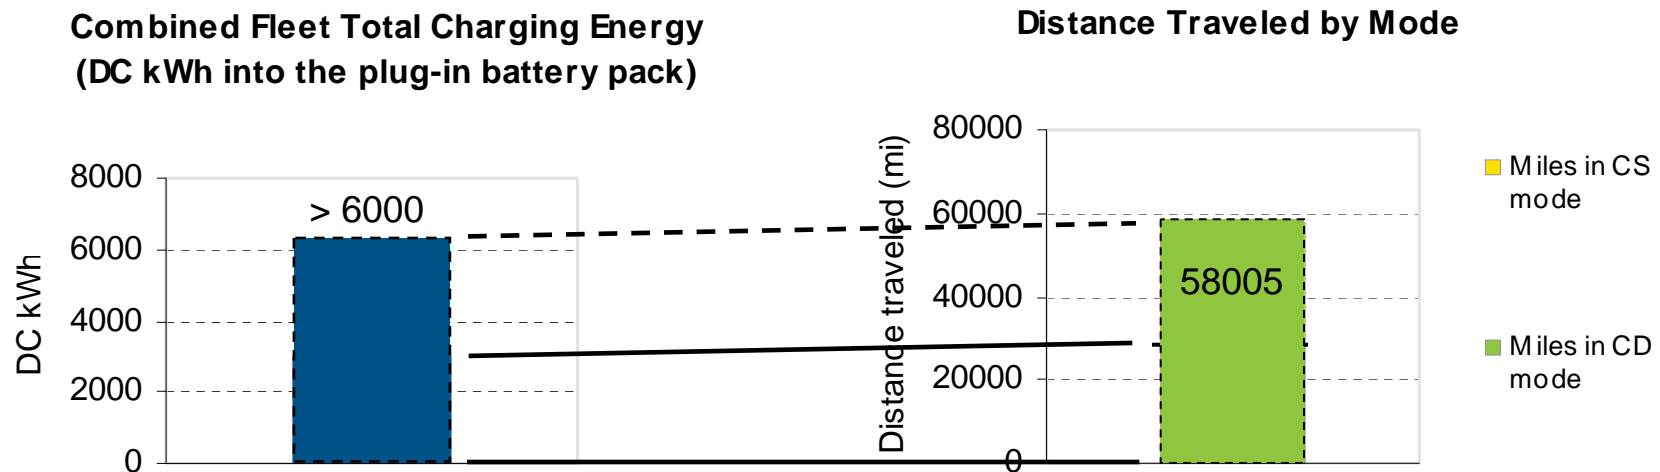

$$3073 \text{ kWh} / 28185 \text{ mi} = 108 \text{ Wh/mi}$$

$$58005 \text{ mi} * 108 \text{ Wh/mi} = 6265 \text{ kWh}$$


Need > twice the electricity for 100% charge depleting miles (all other things equal)

CD = Charge depleting
CS = Charge sustaining

PHEV Fleet Performance

- For better gasoline fuel efficiency, use more electricity!
- Battery capacity limited, so plug in more often
- Or put another way:
For charge depleting operation, distance driven between charging events must be less than charge depleting range


Fleet Distance vs. Range

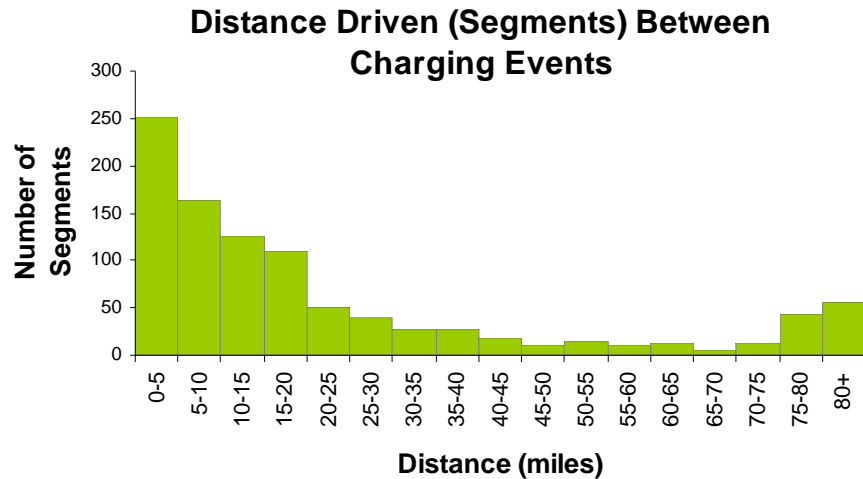

Hymotion Prius

23 cars

Jan – Jul 2008

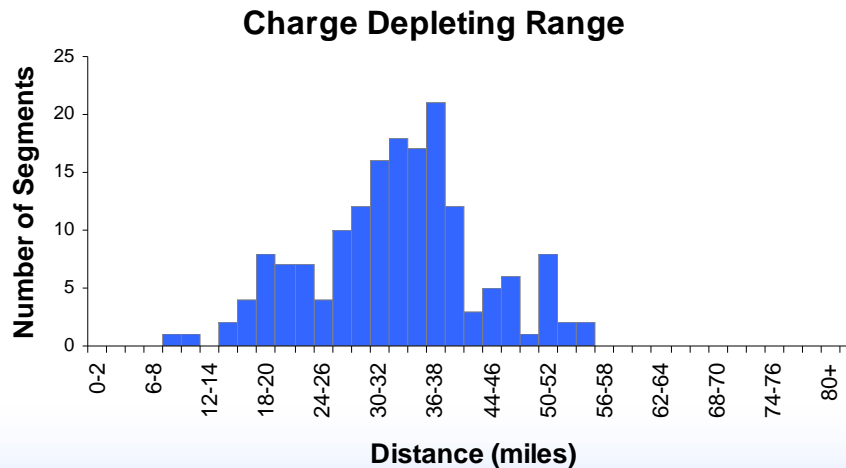


Same cars, date range

Includes all segments that started with SOC > 95%, ended in CS mode.


CD range is CD distance for each segment.

Fleet Fuel and Electricity vs. Segment Distance

MPG vs. Distance Driven Between Charging Events

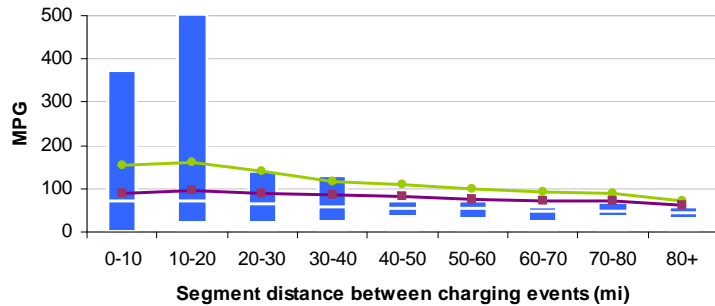

DC kWh vs. Distance Driven Between Charging Events

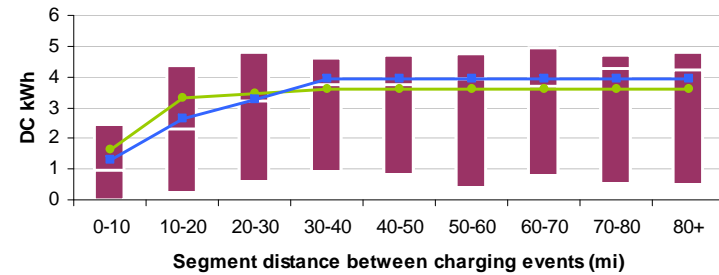


(42 EV-only segments not included)

“Actual Mileage May Vary”

- **Even when in charge depleting mode, gasoline fuel efficiency, electrical energy efficiency, and charge depleting range vary widely depending on usage**
- **Causes of variation**
 - **Driver aggressiveness**
 - **Location (city, rural, highway)**
 - **Temperature**
 - **Payload**
 - **Etc.**

Driver Aggressiveness

Effect of Aggressiveness on Trip Fuel Economy

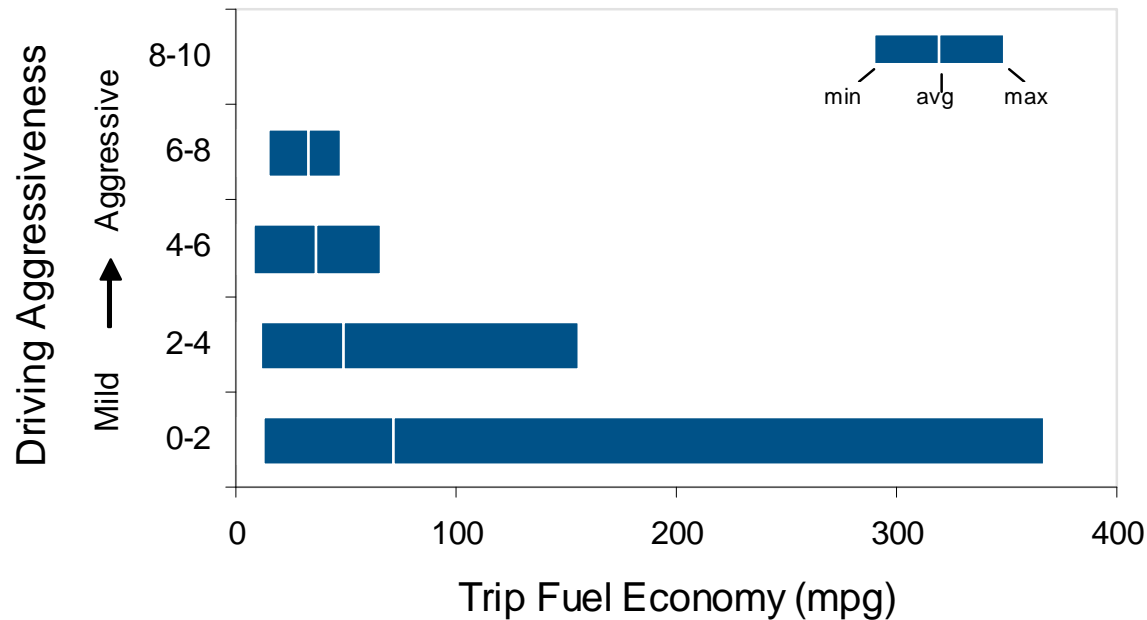

28 Hymotion
Priuses

Jan – Jun 2008

All trips with
distance > 1 mi


- Aggressiveness measured by time at accelerator pedal position
- The deeper the pedal, the higher the aggressiveness

Fuel Economy Seasonal Variation

Overall Gasoline Fuel Economy
Fleet Distribution by Month

28 Hymotion
Priuses

Jan – Jun 2008

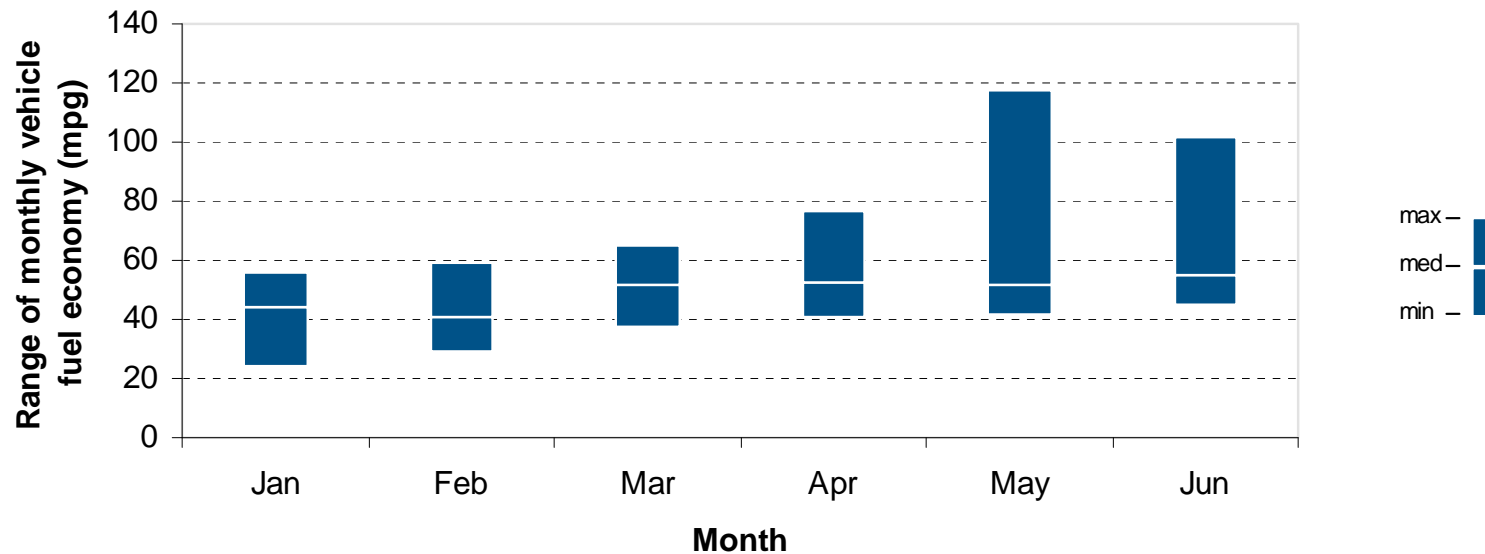


Plug-in Charging Patterns


Average number of charging events per vehicle per month	20
Average number of charging events per vehicle per day when vehicle driven	0.7
Average number of trips between charging events	3.9
Average distance driven between charging events (mi)	34.0
Average duration of charging event (hr)	2.4
Average energy per charging event (DC kWh)	1.8
Average charging energy per vehicle per month (DC kWh)	35.3

Plug-in Charging Patterns

Time of Day When Driving

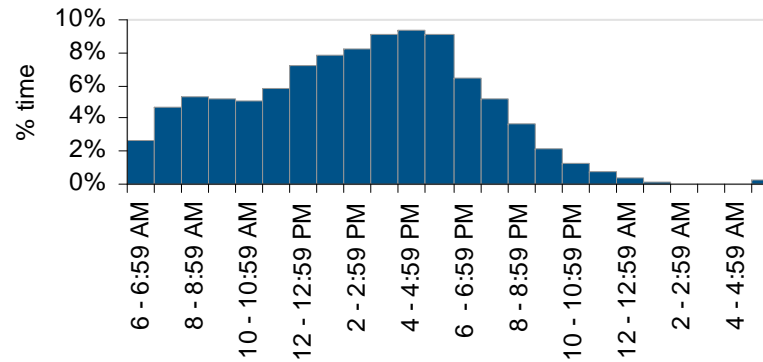


Time at the Start of Charging Events

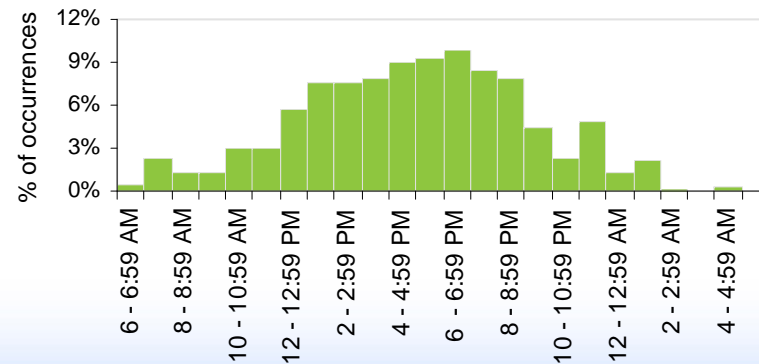

Plug-in Charging Patterns

Energy Consumed vs. Time of Day When Charging

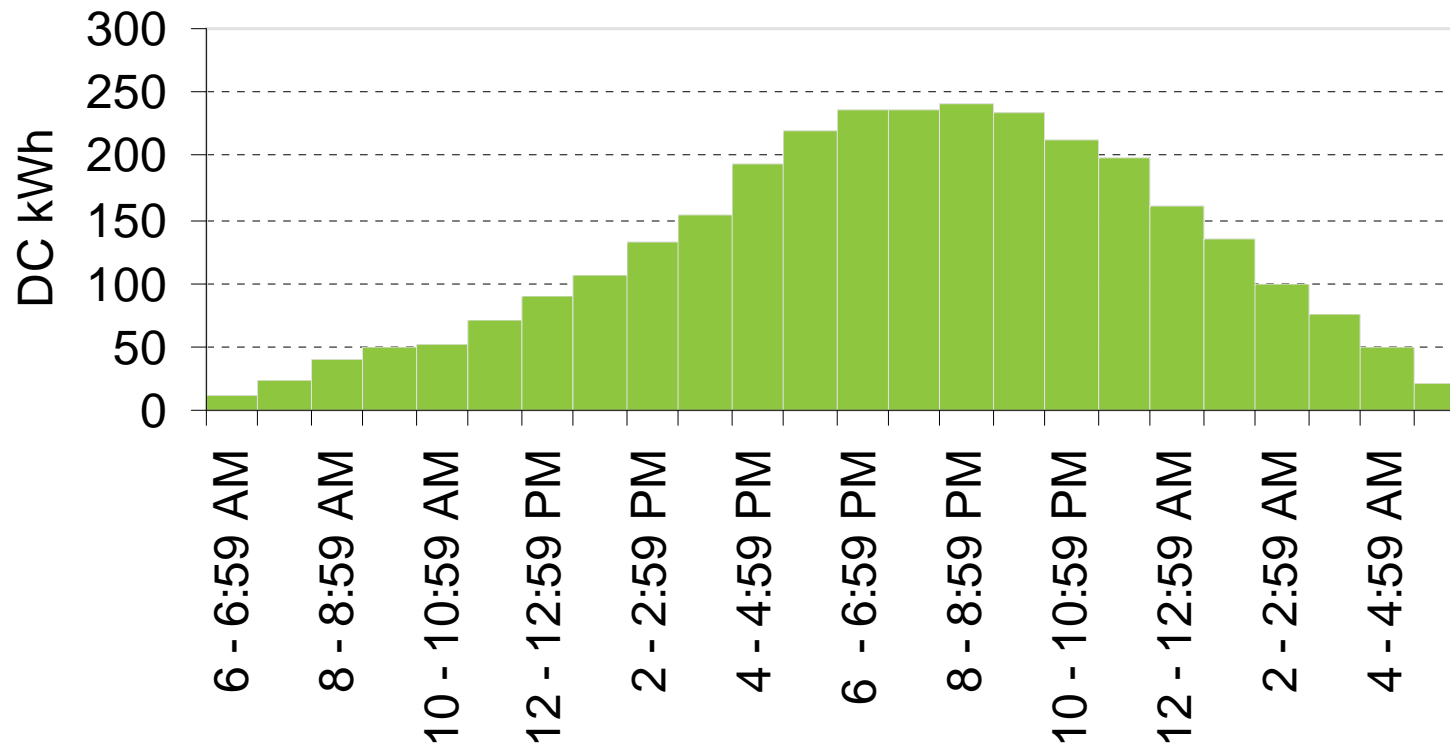

PHEV/EV Impact on Electrical Grid

Basic questions to answer:

- **How many PHEVs?**
- **What kind of PHEVs (energy capacity)?**
- **Where are they charging?**
 - **Population density**
 - **Type of service/circuit**
- **When are they charging?**
- **How are they charging (power demand)?**

PHEV – Grid Interaction Testing

- **Time-of-day charging study (Fall 2008)**
 - **Conducting charging demonstration with City of Seattle using 13 Seattle area PHEVs**
 - **Includes INL battery impact analysis**
 - **Uses V2Green wireless charging control**
- **Charging infrastructure and facility demand study (started May 2008)**
 - **Conducting charging demonstration with Tacoma Power to:**
 - **document charging infrastructure needs**
 - **determine demand and energy profiles of PHEV charging as portion of facility profiles**
 - **Using WiFi local energy meter (LEM) data collection system**
- **Bidirectional vehicle-to-grid (V2G) charging study with electric utilities participating (Fall 2008)**
 - **6 kW and 20 kW levels, using two lithium battery PHEVs, V2Green cellular charging control, documenting infrastructure requirements and costs**

Acknowledgement

INL/AVTA work is supported by the U.S. Department of Energy's Vehicle Technologies Program

Pat Davis, Tien Duong, Lee Slezak and Ro Sullivan

Additional Information

<http://avt.inl.gov>

or

<http://www1.eere.energy.gov/vehiclesandfuels/avta/>

INL/CON-08-14805